


TECHNICAL DATA SHEET

550MM BASIN WITH ONE TAP HOLE AND FULL PEDESTAL

Category: basins
Guarantee: 25 year

Type: basins with full pedestals Volume: 0.11

Weight: 31.00

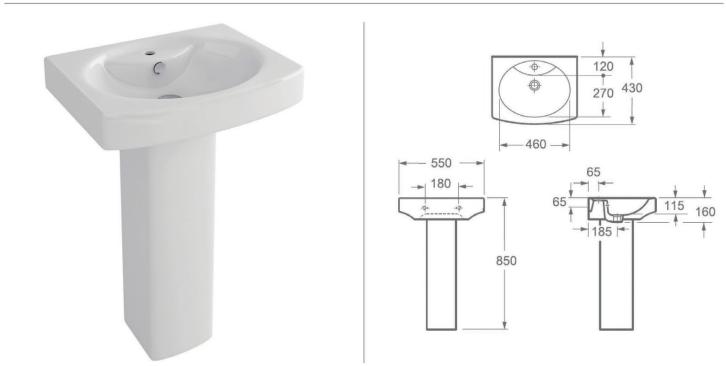

Dimensions are in millimetres except thread sizes which are BSP imperial.

Features

- · Excludes fittings, wastes, taps
- · Fischer Fixing Systems recommended

Notes

Our guarantee is subject to the product having been installed, used and maintained in accordance with our instructions. All working parts (such as hinges, ceramic disks, cartridges, seals and cistern fittings), which are subject to normal wear and tear, are covered for 36 months from proof of purchase date. This excludes seats, which are covered for 12 months. Our guarantee applies to the original purchaser and is nontransferable. Our guarantee is only applicable in the UK and ROI. This does not affect your statutory rights.

We recommend that a pressure reducing valve is fitted in installations where the water supply pressure exceeds 3 bar. Pressure in excess of 3 bar could reduce the working life of this product and invalidate the guarantee.




TECHNICAL DATA SHEET

550MM BASIN WITH ONE TAP HOLE AND HALF PEDESTAL

Category: basins
Guarantee: 25 year

Type: basins with semi pedestals Volume: 0.10

Weight: 23.20

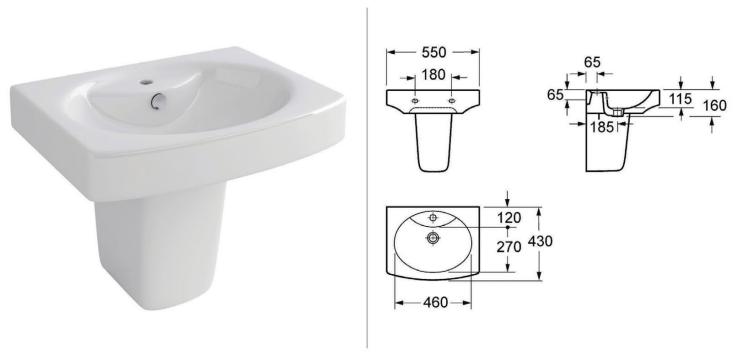

Dimensions are in millimetres except thread sizes which are BSP imperial.

Features

- Excludes fittings, wastes, taps
- · Fischer Fixing Systems recommended

Notes

Our guarantee is subject to the product having been installed, used and maintained in accordance with our instructions. All working parts (such as hinges, ceramic disks, cartridges, seals and cistern fittings), which are subject to normal wear and tear, are covered for 36 months from proof of purchase date. This excludes seats, which are covered for 12 months. Our guarantee applies to the original purchaser and is nontransferable. Our guarantee is only applicable in the UK and ROI. This does not affect your statutory rights.

We recommend that a pressure reducing valve is fitted in installations where the water supply pressure exceeds 3 bar. Pressure in excess of 3 bar could reduce the working life of this product and invalidate the guarantee.



TECHNICAL DATA SHEET

BACK-TO-WALL WC BOWL AND QUICK-RELEASE SEAT

Category: toilets


Guarantee: 25 year sanitaryware/1 year

seat

Type: back to wall suites Volume:

Weight: 29.40



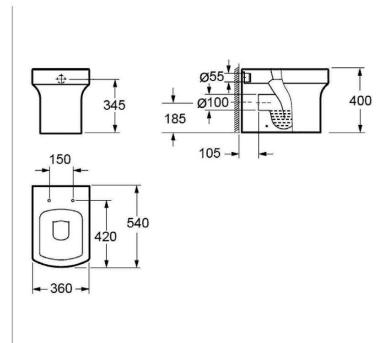

0.09

Dimensions are in millimetres except thread sizes which are BSP imperial.

Features

· Includes fittings

Notes

Our guarantee is subject to the product having been installed, used and maintained in accordance with our instructions. All working parts (such as hinges, ceramic disks, cartridges, seals and cistern fittings), which are subject to normal wear and tear, are covered for 36 months from proof of purchase date. This excludes seats, which are covered for 12 months. Our guarantee applies to the original purchaser and is nontransferable. Our guarantee is only applicable in the UK and ROI. This does not affect your statutory rights.

We recommend that a pressure reducing valve is fitted in installations where the water supply pressure exceeds 3 bar. Pressure in excess of 3 bar could reduce the working life of this product and invalidate the guarantee.



TECHNICAL DATA SHEET

0.15

CLOSE-COUPLED WC BOWL, CISTERN AND QUICK-RELEASE SEAT


Category: toilets

Guarantee: 25 year sanitaryware/1 year

seat

Type: close coupled suites

Weight: 47.10

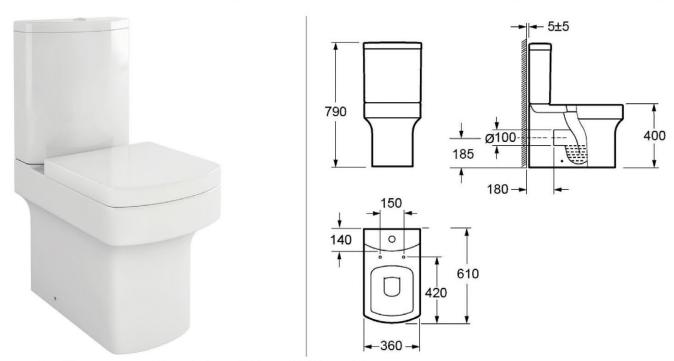

Volume:

Dimensions are in millimetres except thread sizes which are BSP imperial.

Features

- Dual 6 and 3 litre flush fittings supplied as standard
- · Water saving 4 and 2.5 litre economy flush capability
- · Includes WRAS approved fittings

Notes

Our guarantee is subject to the product having been installed, used and maintained in accordance with our instructions. All working parts (such as hinges, ceramic disks, cartridges, seals and cistern fittings), which are subject to normal wear and tear, are covered for 36 months from proof of purchase date. This excludes seats, which are covered for 12 months. Our guarantee applies to the original purchaser and is nontransferable. Our guarantee is only applicable in the UK and ROI. This does not affect your statutory rights.

We recommend that a pressure reducing valve is fitted in installations where the water supply pressure exceeds 3 bar. Pressure in excess of 3 bar could reduce the working life of this product and invalidate the guarantee.