





E70036

Height: 800
Width: 300
Depth: 93-113

Tube ϕ : 25 + 30x40 D Section
Pipe Centres / Face-Face Cons: 255
Elec. element if specified: 100 W
Output @ 50° C Δ T Watts: 177 W
BTUs: 604 W

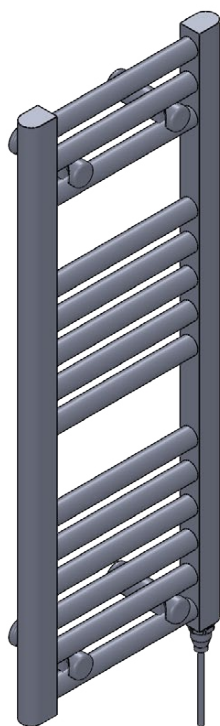

brackets extendable
by a further 20mm

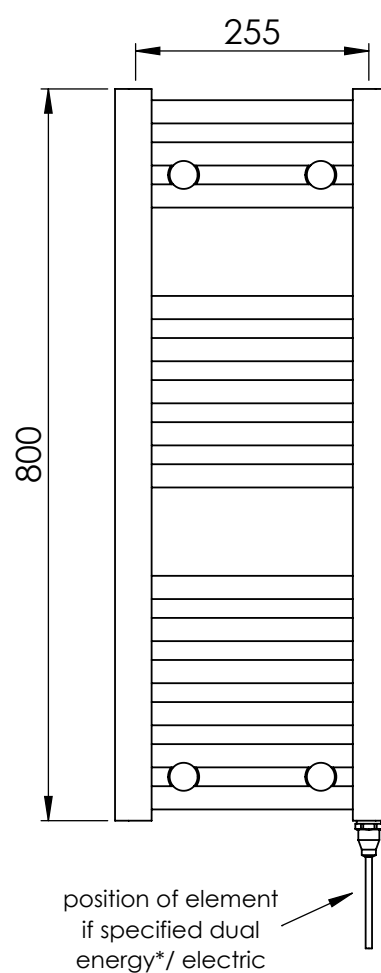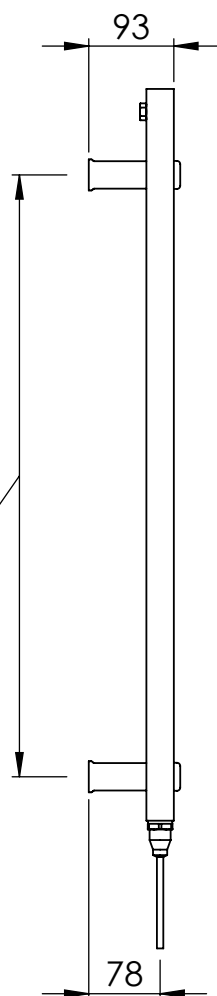

*Dual energy models require a conversion-tee, consult relevant drawing for details.

esteem
bathrooms

25mm Straight

All dimensions in millimetres





Manufactured from Mild Steel

SCALE 1:8

E70037

Height: 800
Width: 400
Depth: 93-113

Tube ϕ : 25 + 30x40 D Section
Pipe Centres / Face-Face Cons: 355
Elec. element if specified: 125 W
Output @ 50° C Δ T Watts: 226 W
BTUs: 771 W

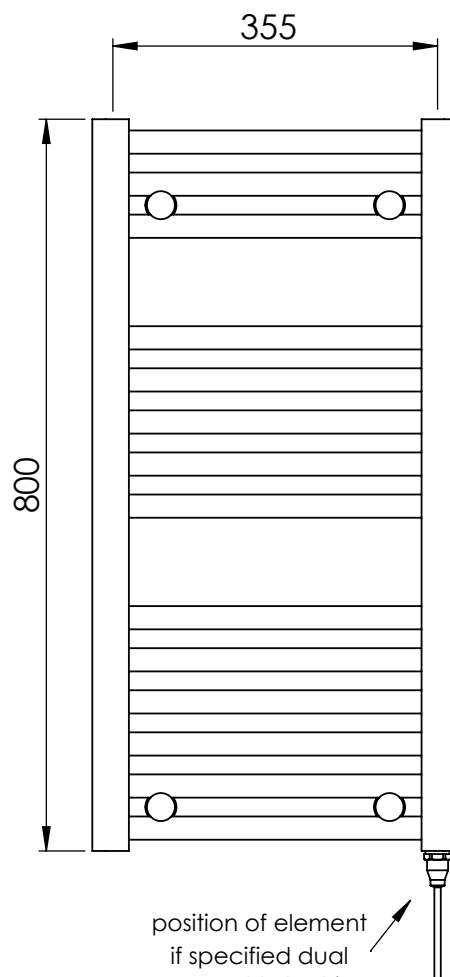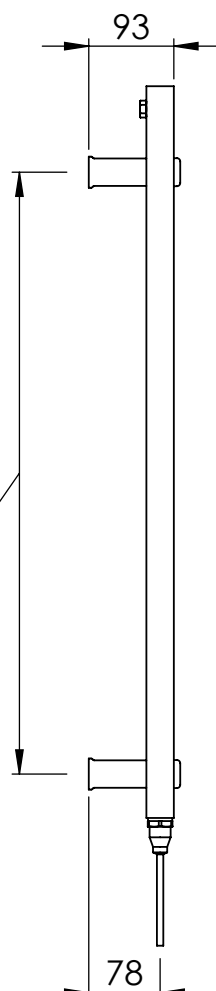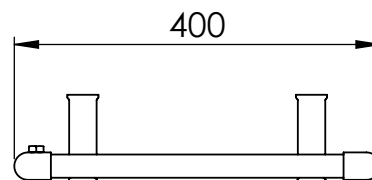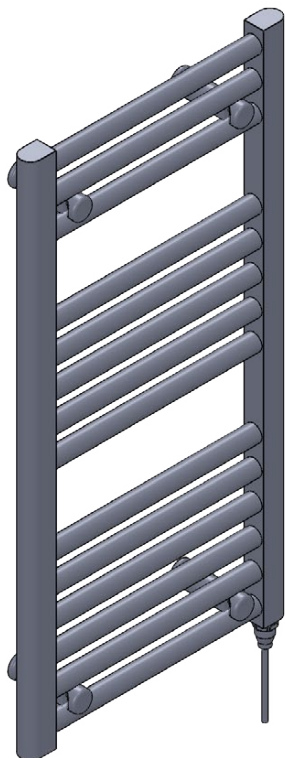

brackets extendable
by a further 20mm

position of element
if specified dual
energy*/ electric

*Dual energy models require a conversion-tee, consult relevant drawing for details.



25mm Straight

All dimensions in millimetres

Manufactured from Mild Steel

SCALE 1:8

E70038

Height: 800

Width: 500

Depth: 93


Tube ϕ : 25 + 30x40 D Section

Pipe Centres / Face-Face Cons: 455



Elec. element if specified: 150 W

Output @ 50°C Δ T Watts: 275 W

BTUs: 938 W

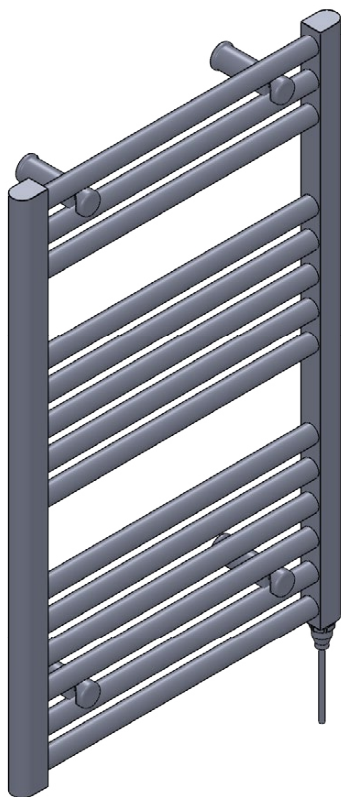

brackets extendable
by a further 20mm

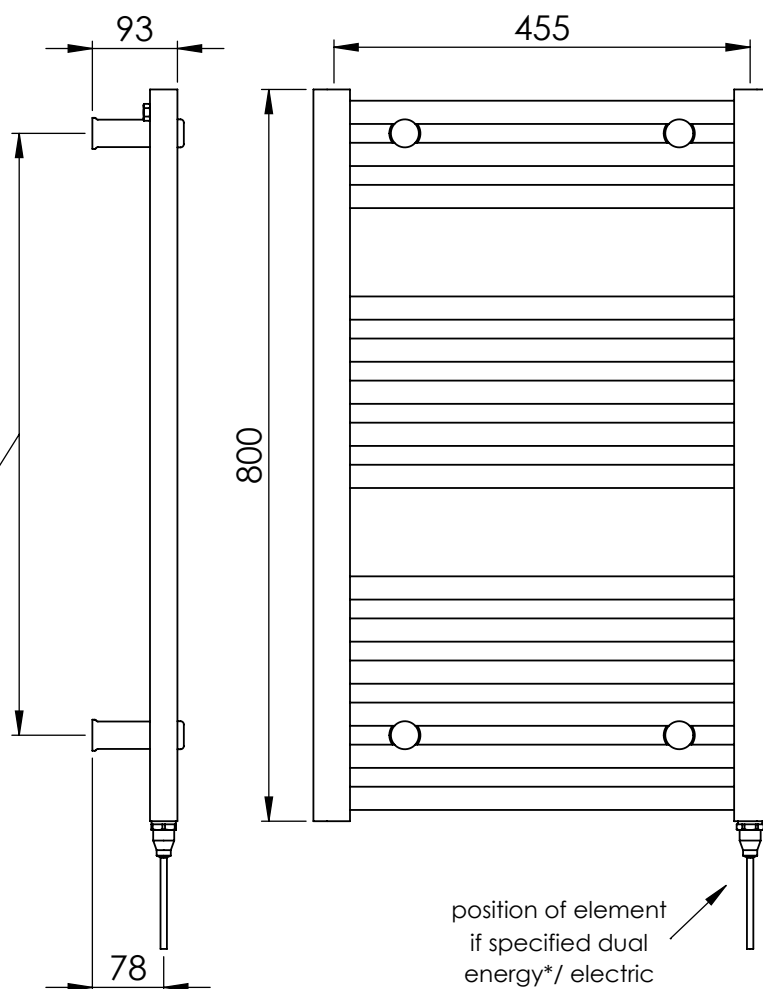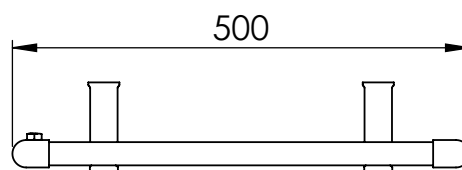

*Dual energy models require a conversion-tee, consult relevant drawing for details.

esteem
bathrooms

25mm Straight

All dimensions in millimetres


Manufactured from Mild Steel

SCALE 1:8


E70039

Height: 800
Width: 600
Depth: 93-113

Tube ϕ : 25 + 30x40 D Section
Pipe Centres / Face-Face Cons: 555
Elec. element if specified: 200 W
Output @ 50°C Δ T Watts: 324 W
BTUs: 1105 W

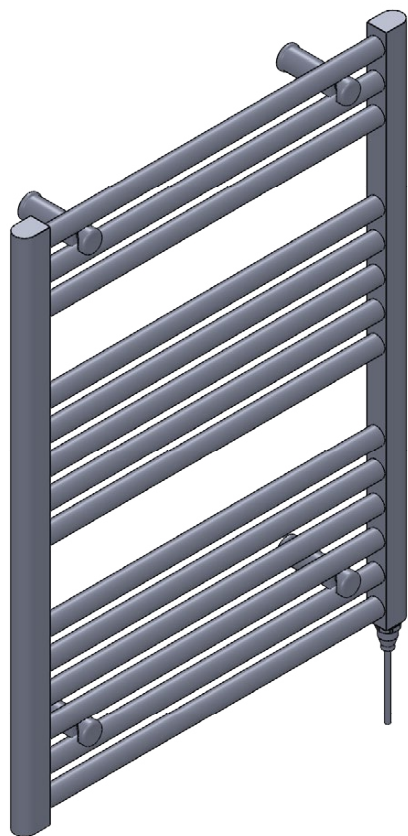

brackets extendable
by a further 20mm

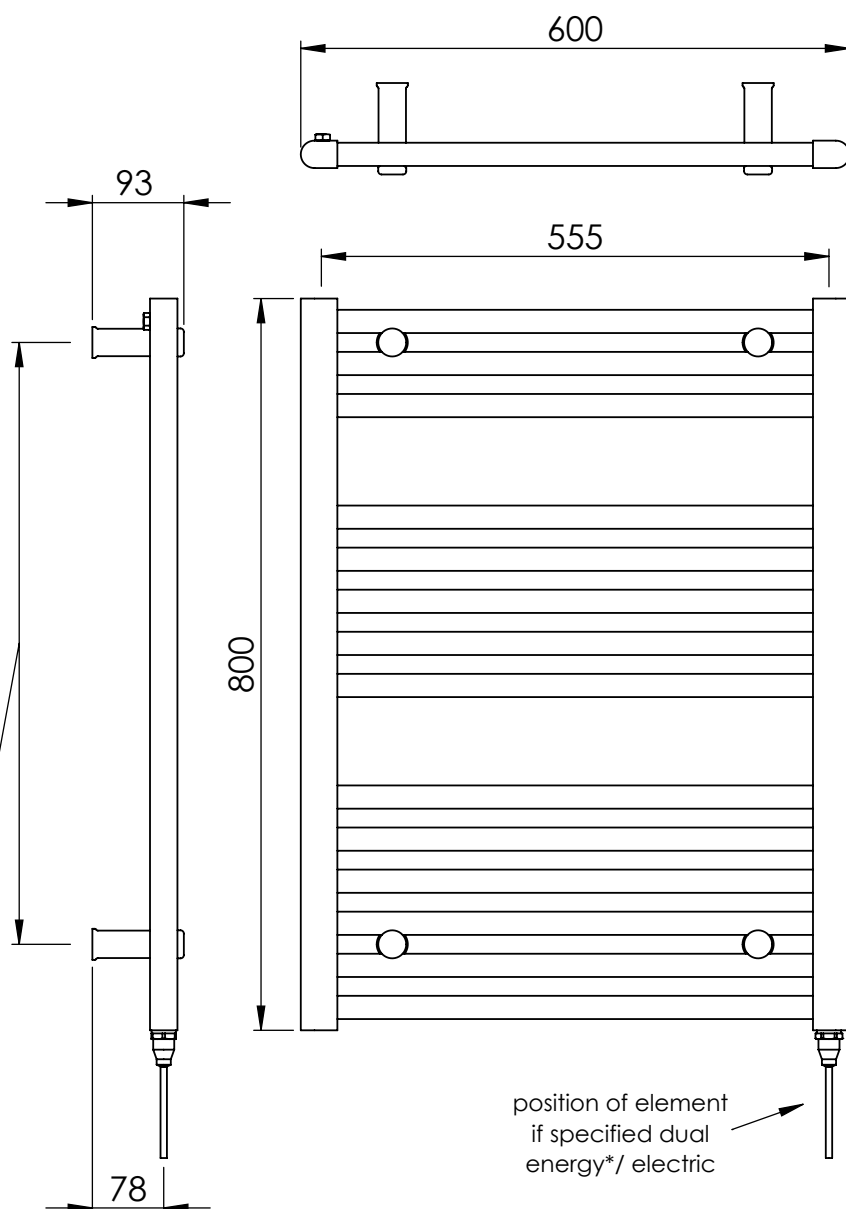

position of element
if specified dual
energy*/ electric

*Dual energy models require a conversion-tee, consult relevant drawing for details.

esteem
bathrooms

25mm Straight

All dimensions in millimetres

Manufactured from Mild Steel

SCALE 1:8

E70040

Height: 1000

Width: 500

Depth: 93-113


Tube ϕ : 25 + 30x40 D Section

Pipe Centres / Face-Face Cons: 455


Elec. element if specified: 200 W

Output @ 50°C Δ T Watts: 351 W

BTUs: 1198 W

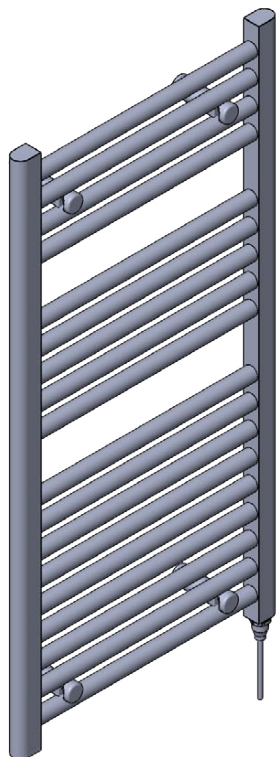

brackets extendable
by a further 20mm

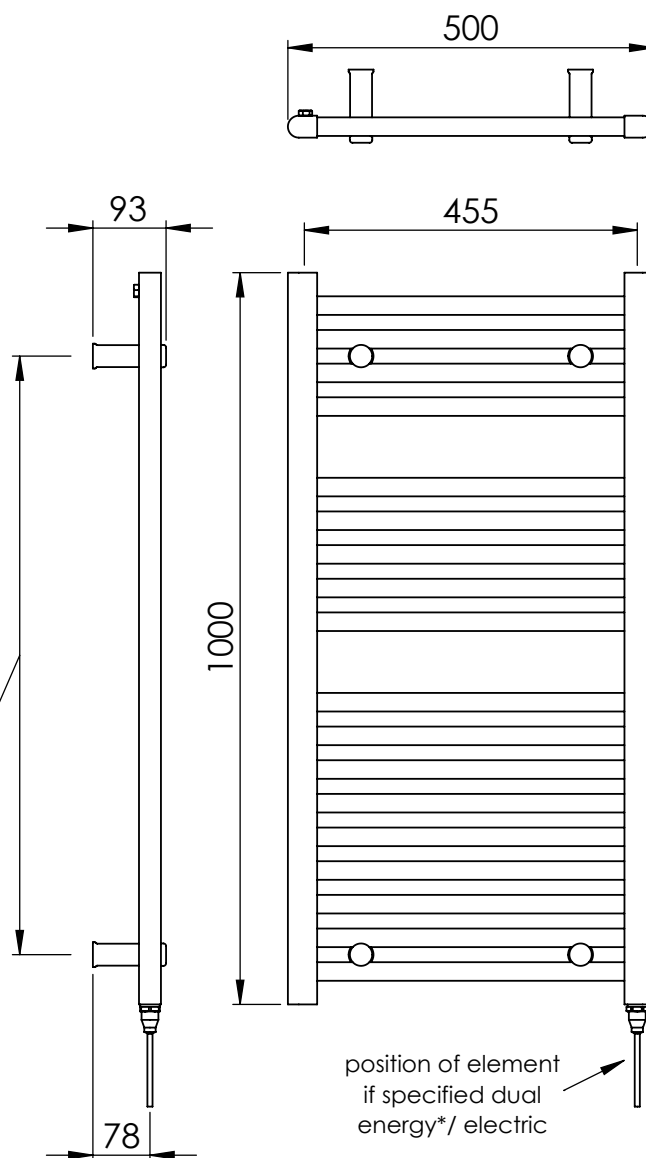

*Dual energy models require a conversion-tee, consult relevant drawing for details.

esteem
bathrooms

25mm Straight

All dimensions in millimetres

Manufactured from Mild Steel

SCALE 1:10

E70041

Height: 1000

Width: 600

Depth: 93


Tube ϕ : 25 + 30x40 D Section

Pipe Centres / Face-Face Cons: 555


Elec. element if specified: 200 W

Output @ 50°C Δ T Watts: 414 W

BTUs: 1413 W

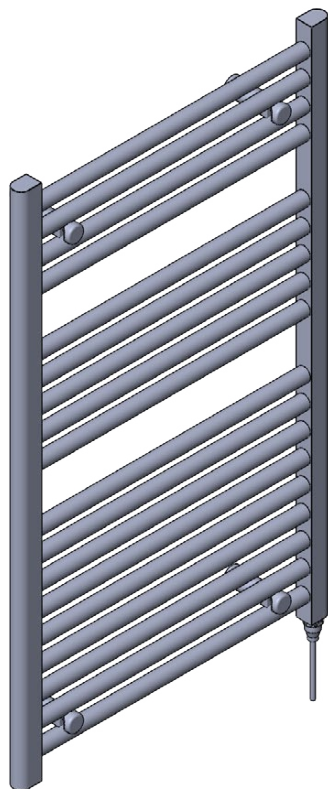

brackets extendable
by a further 20mm

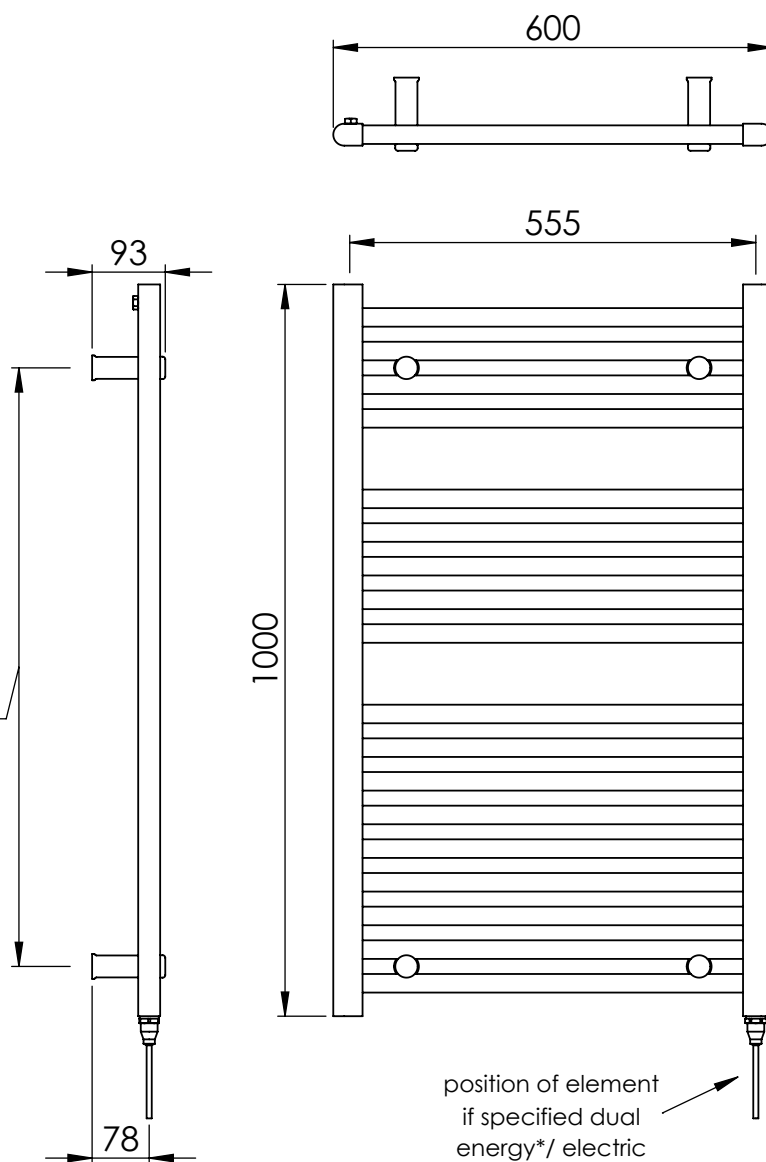

*Dual energy models require a conversion-tee, consult relevant drawing for details.

esteem
bathrooms

25mm Straight

All dimensions in millimetres


Manufactured from Mild Steel

SCALE 1:10




E70042

Height: 1200
Width: 300
Depth: 93-113

Tube ϕ : 25 + 30x40 D Section
Pipe Centres / Face-Face Cons: 255
Elec. element if specified: 200 W
Output @ 50° C Δ T Watts: 273 W
BTUs: 931 W

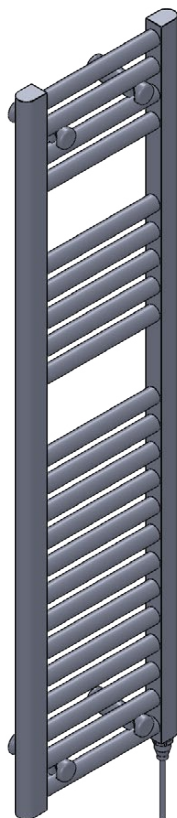

brackets extendable
by a further 20mm

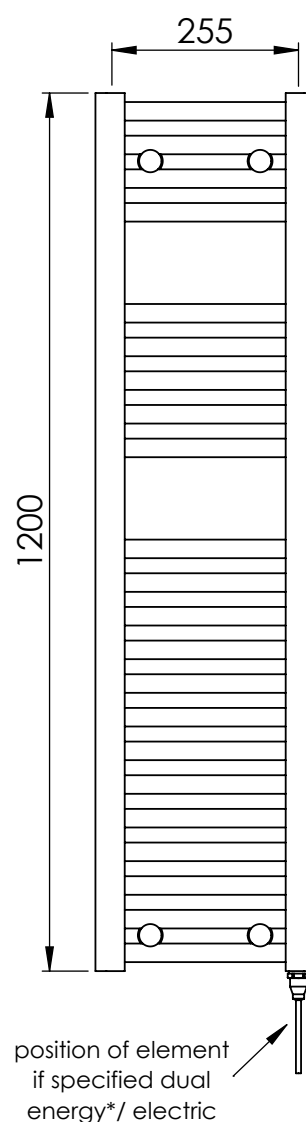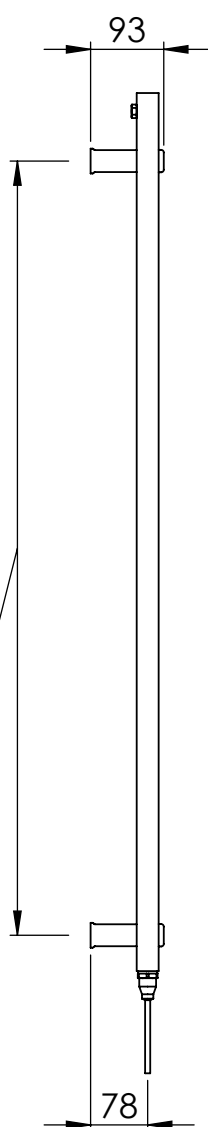

*Dual energy models require a conversion-tee, consult relevant drawing for details.



25mm Straight

All dimensions in millimetres


Manufactured from Mild Steel

SCALE 1:10




E70043

Height: 1200
Width: 400
Depth: 93-113

Tube ϕ : 25 + 30x40 D Section
Pipe Centres / Face-Face Cons: 355
Elec. element if specified: 200 W
Output @ 50°C Δ T Watts: 350 W
BTUs: 1194 W

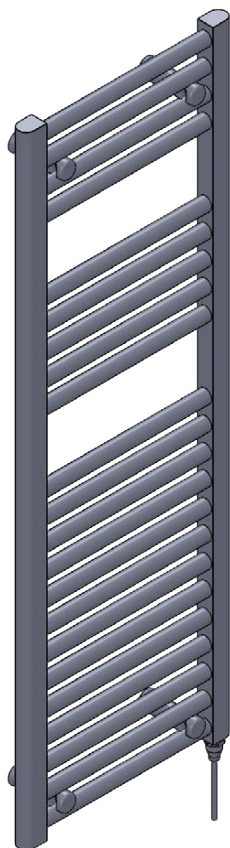

brackets extendable
by a further 20mm

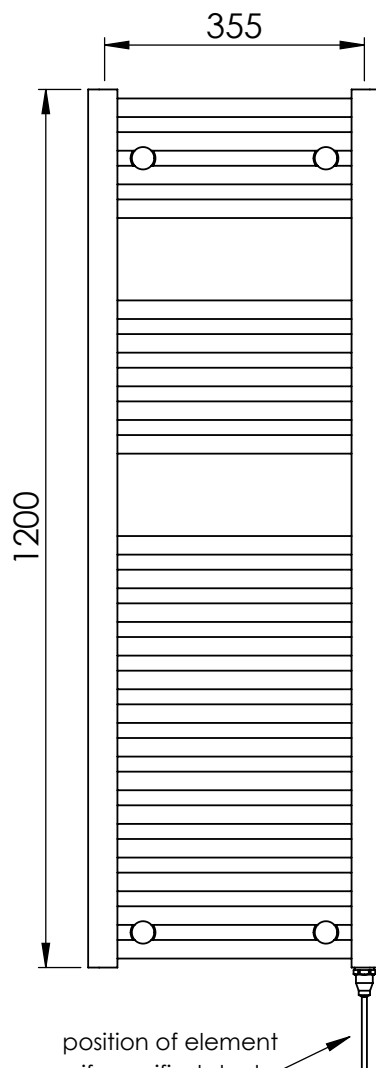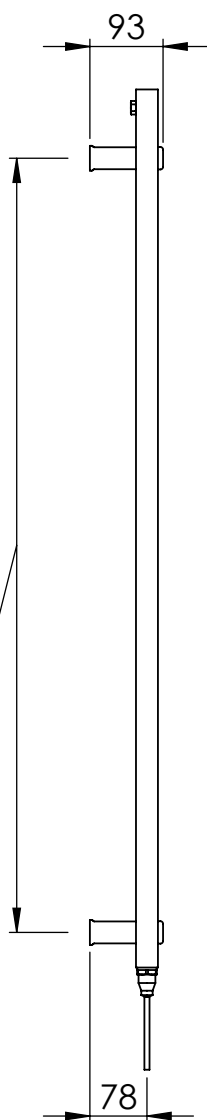

position of element
if specified dual
energy*/ electric

*Dual energy models require a conversion-tee, consult relevant drawing for details.

esteem
bathrooms

25mm Straight

All dimensions in millimetres


Manufactured from Mild Steel

SCALE 1:10




E70044

Height: 1200
Width: 500
Depth: 93-113

Tube ϕ : 25 + 30x40 D Section
Pipe Centres / Face-Face Cons: 455
Elec. element if specified: 300 W
Output @ 50° C Δ T Watts: 428 W
BTUs: 1460 W

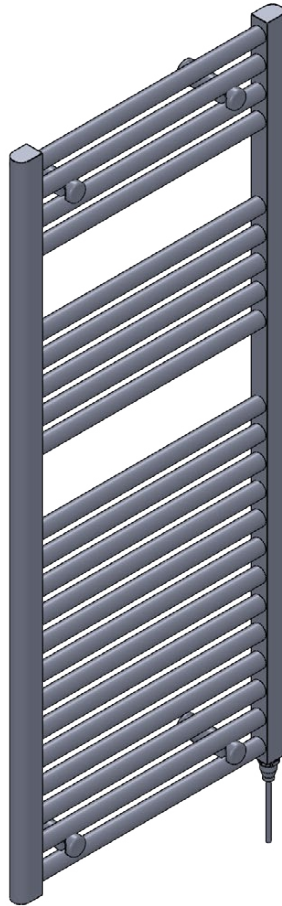

brackets extendable
by a further 20mm

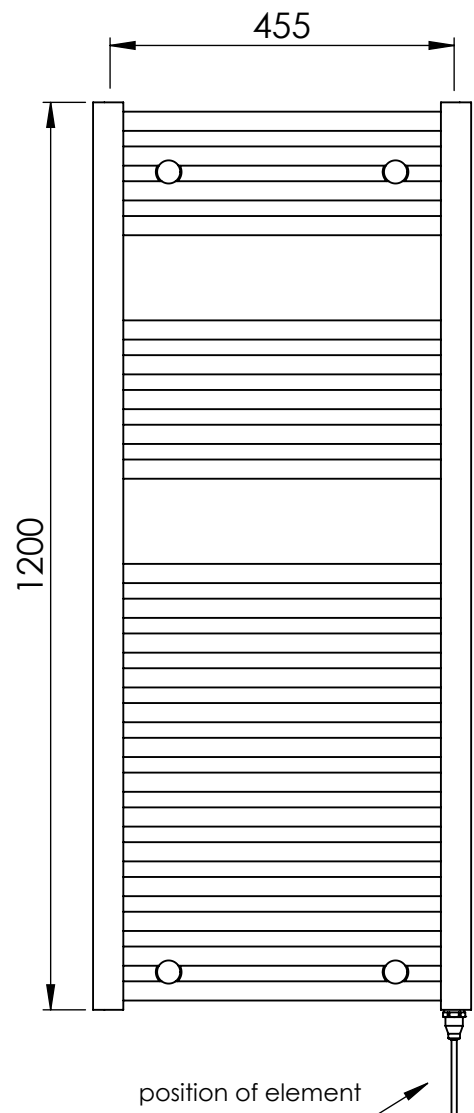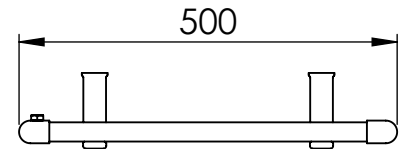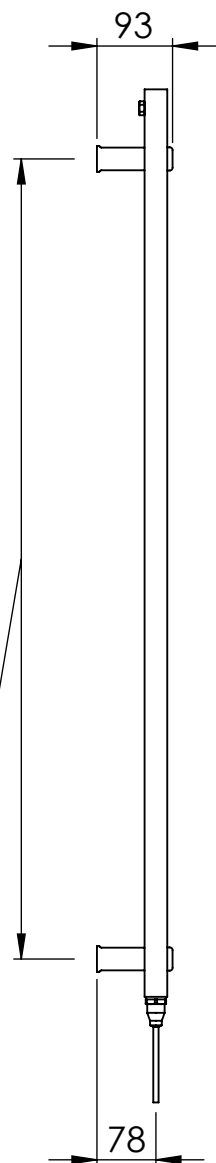

position of element
if specified dual
energy*/ electric

*Dual energy models require a conversion-tee, consult relevant drawing for details.

esteem
bathrooms

25mm Straight

All dimensions in millimetres


Manufactured from Mild Steel

SCALE 1:10


E70045

Height: 1200
Width: 600
Depth: 93-113

Tube ϕ : 25 + 30x40 D Section
Pipe Centres / Face-Face Cons: 555
Elec. element if specified: 400 W
Output @ 50° C Δ T Watts: 505 W
BTUs: 1723 W

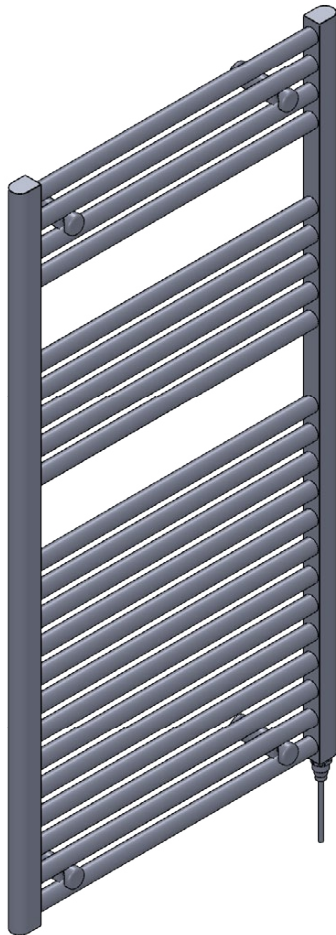

brackets extendable
by a further 20mm

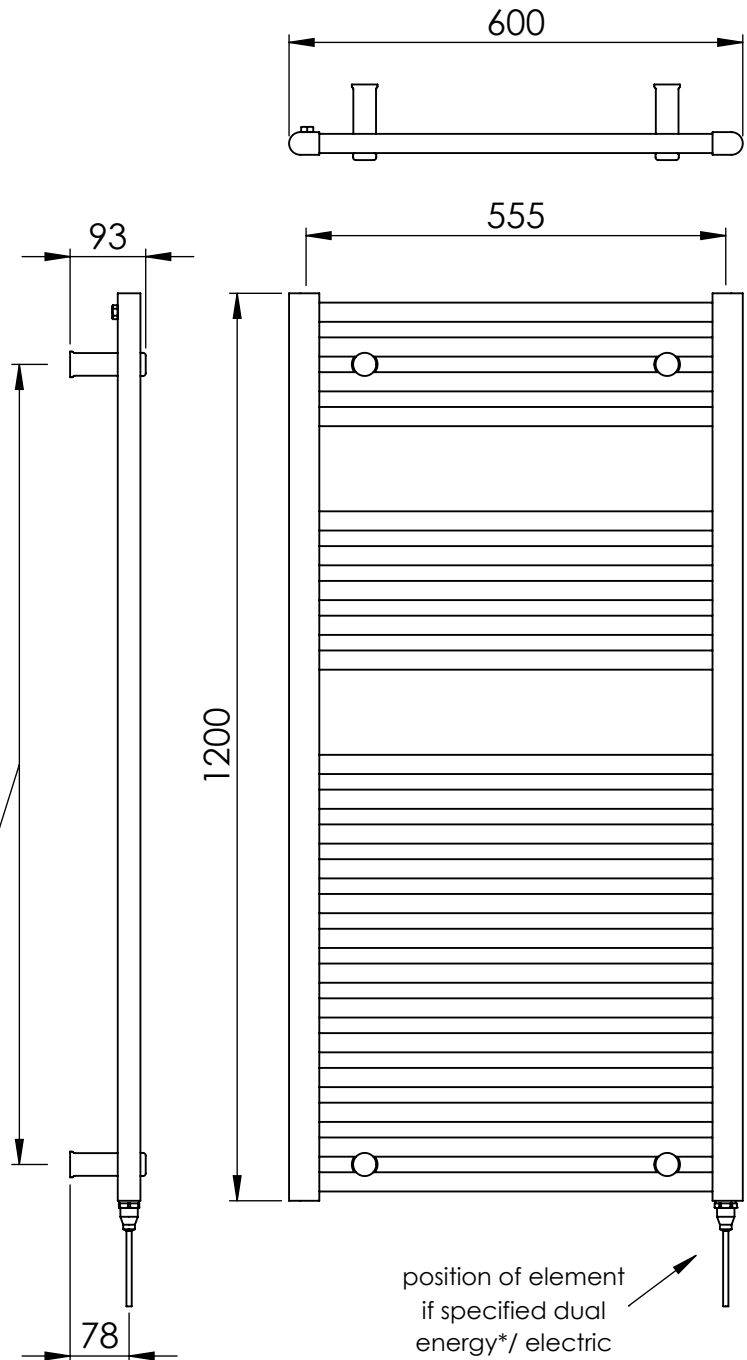

*Dual energy models require a conversion-tee, consult relevant drawing for details.

esteem
bathrooms

25mm Straight

All dimensions in millimetres


Manufactured from Mild Steel

SCALE 1:10



E70046

Height: 1500
Width: 500
Depth: 93-113

Tube ϕ : 25 + 30x40 D Section
Pipe Centres / Face-Face Cons: 455
Elec. element if specified: 300 W
Output @ 50° C Δ T Watts: 534 W
BTUs: 1822 W

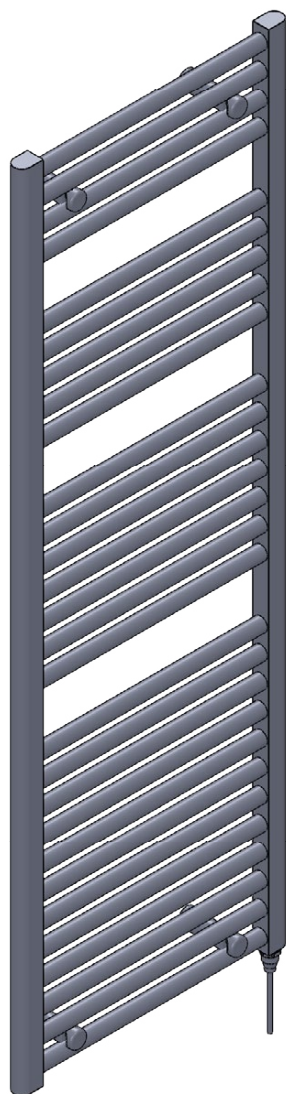

brackets extendable
by a further 20mm

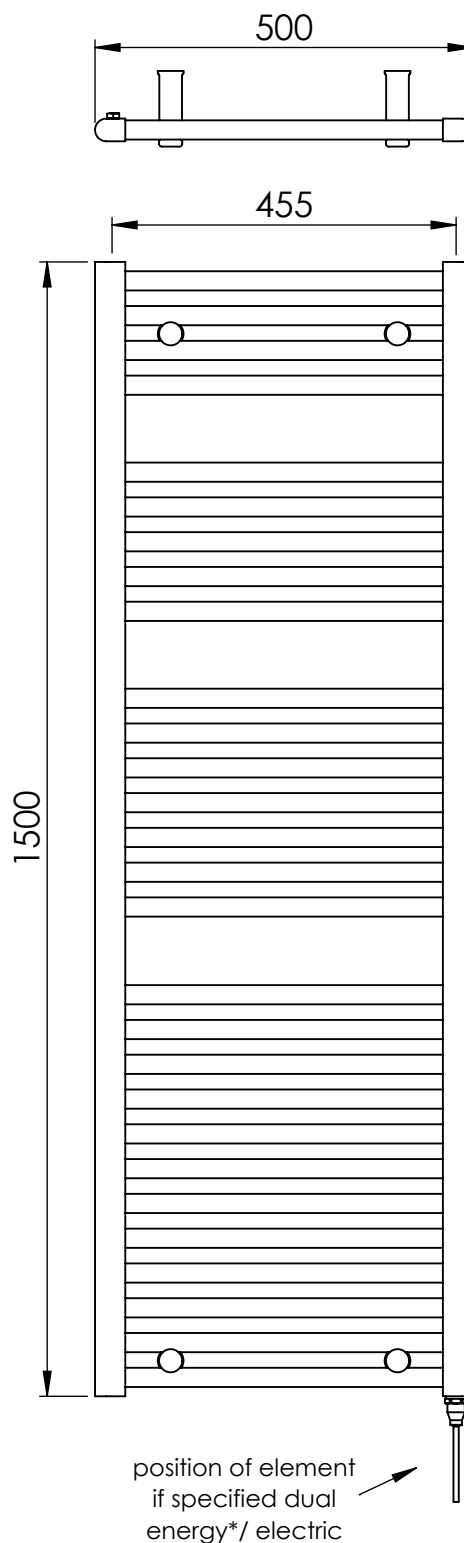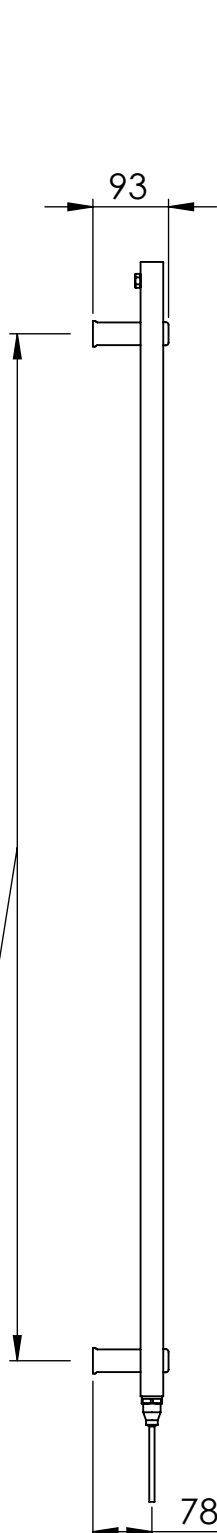

*Dual energy models require a conversion-tee, consult relevant drawing for details.

esteem
bathrooms

25mm Straight

All dimensions in millimetres


Manufactured from Mild Steel

SCALE 1:10


E70047

Height: 1500
Width: 600
Depth: 93-113

Tube ϕ : 1 + 1.2x1.6 D Section
Pipe Centres / Face-Face Cons: 555
Elec. element if specified: 400 W
Output @ 50° C Δ T Watts: 631 W
BTUs: 2153 W

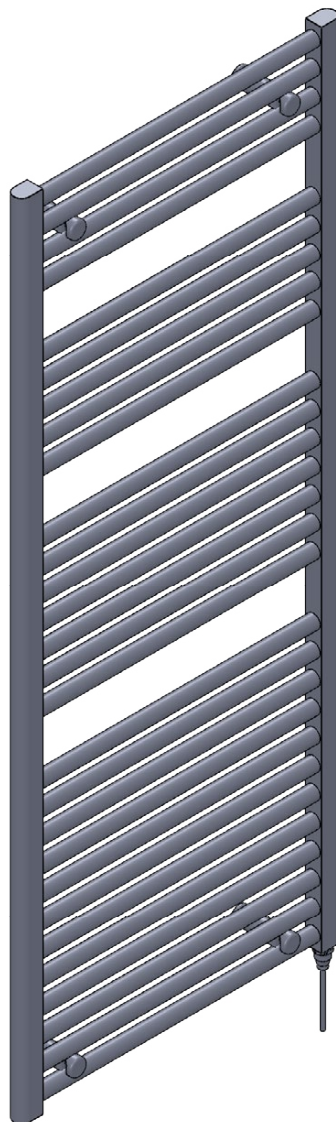

brackets extendable
by a further 20mm

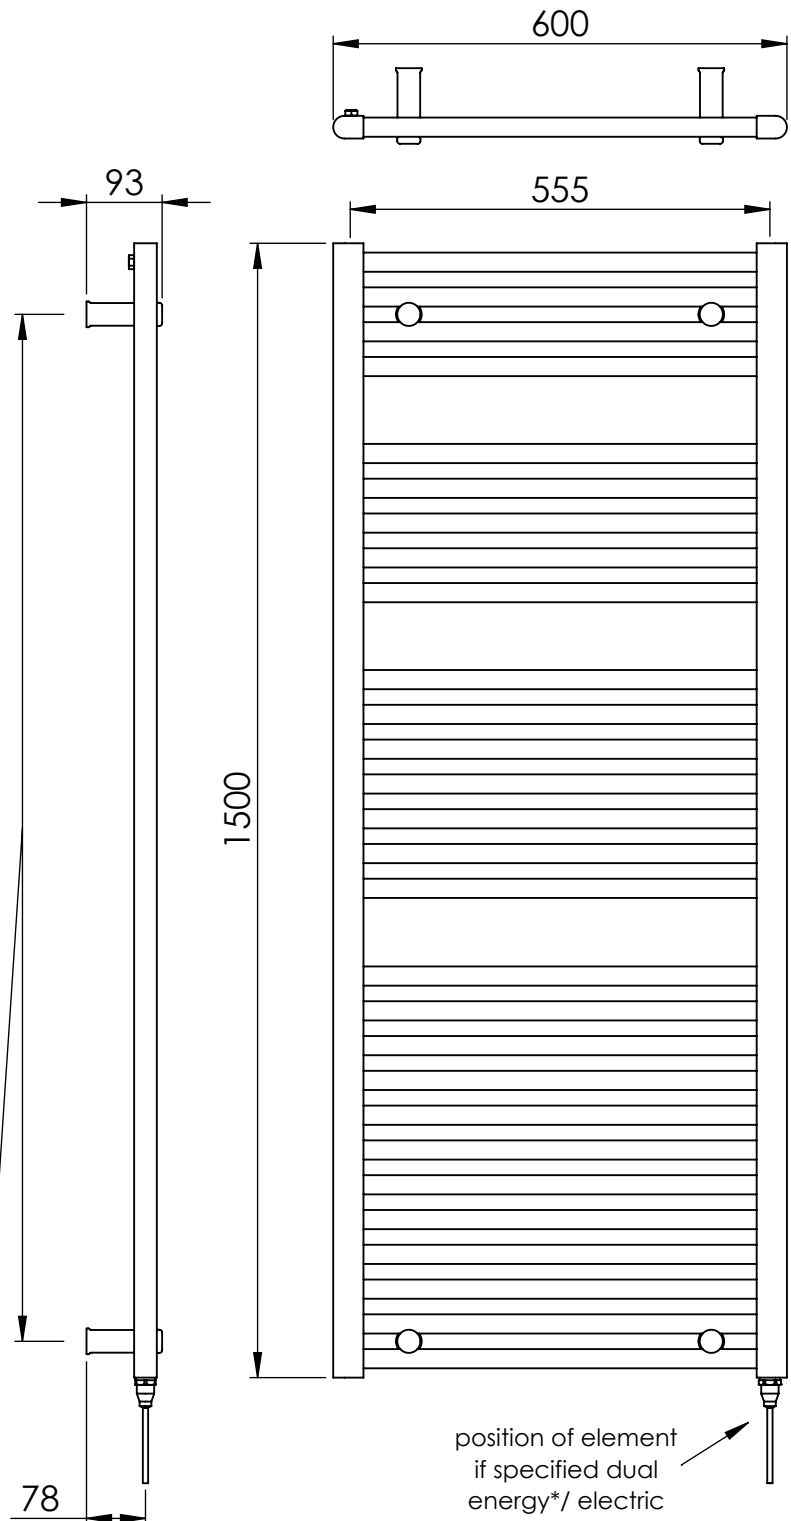

*Dual energy models require a conversion-tee, consult relevant drawing for details.

esteem
bathrooms

25mm Straight

All dimensions in millimetres


Manufactured from Mild Steel

SCALE 1:10


E70048

Height: 1800
Width: 400
Depth: 93-113

Tube ϕ : 25 + 30x40 D Section
Pipe Centres / Face-Face Cons: 355
Elec. element if specified: 400 W
Output @ 50° C Δ T Watts: 521 W
BTUs: 1778 W

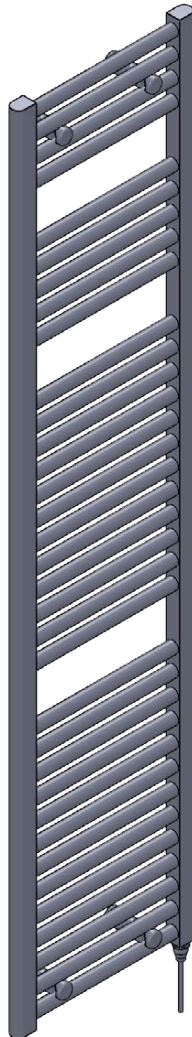

brackets extendable
by a further 20mm

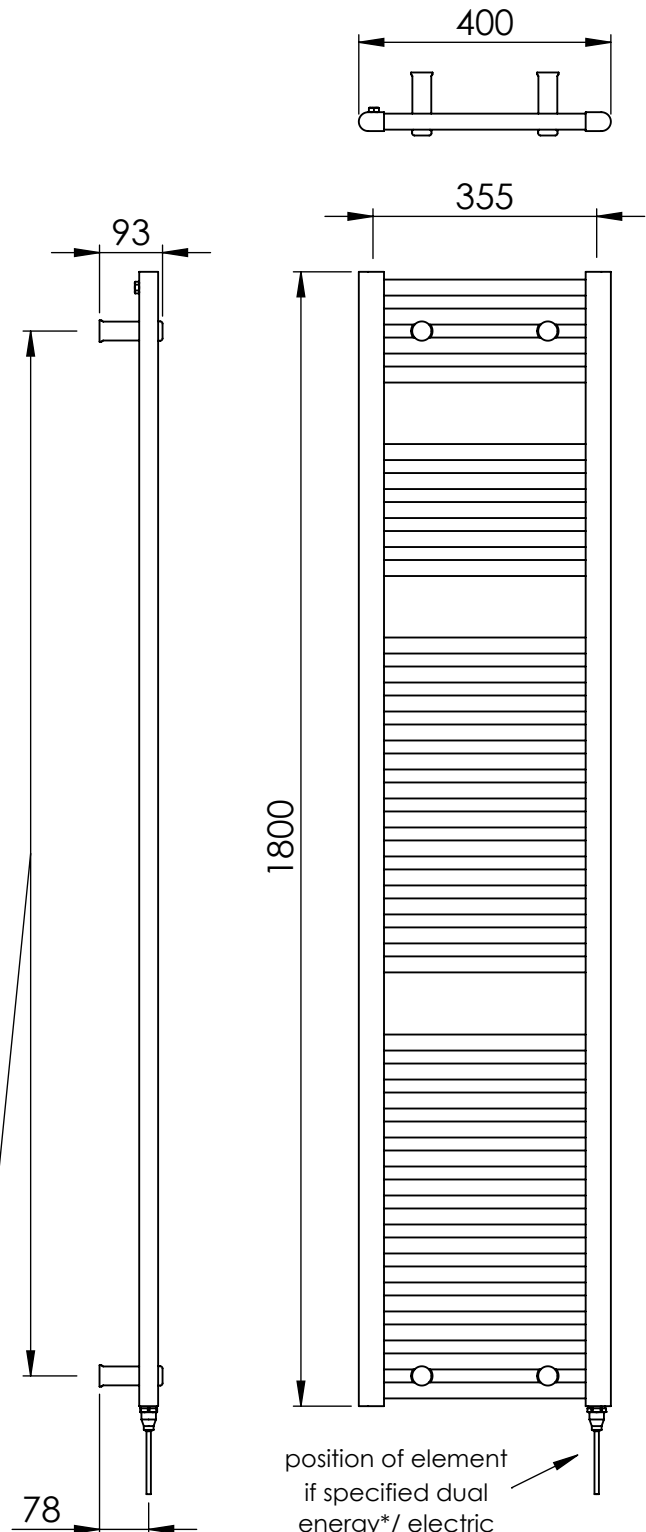

*Dual energy models require a conversion-tee, consult relevant drawing for details.

esteem
bathrooms

25mm Straight

All dimensions in millimetres


Manufactured from Mild Steel

SCALE 1:12


E70049

Height: 1800
Width: 500
Depth: 93-113

Tube ϕ : 25 + 30x40 D Section
Pipe Centres / Face-Face Cons: 555
Elec. element if specified: 600 W
Output @ 50° C Δ T Watts: 638 W
BTUs: 2177 W

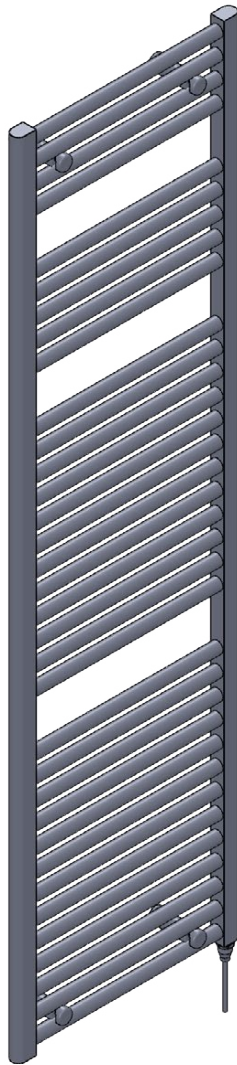

brackets extendable
by a further 20mm

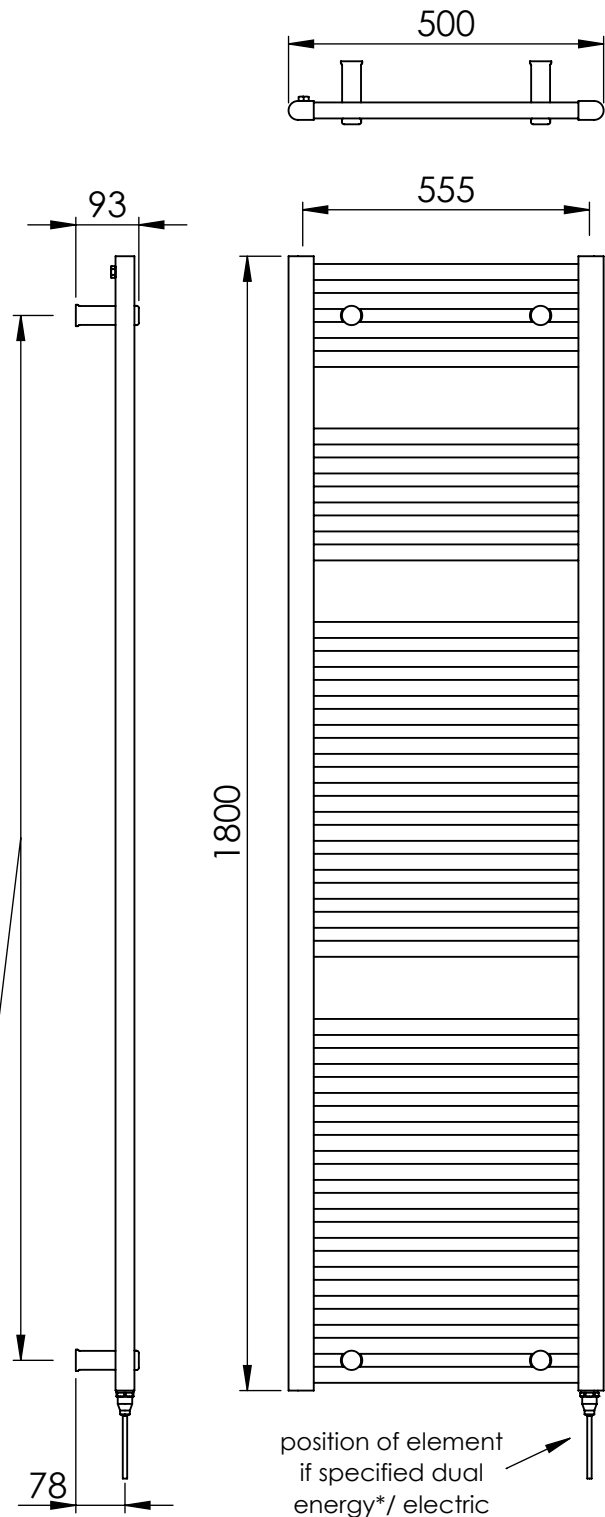

*Dual energy models require a conversion-tee, consult relevant drawing for details.

esteem
bathrooms

25mm Straight

All dimensions in millimetres


Manufactured from Mild Steel

SCALE 1:12


E70050

Height: 1800
Width: 600
Depth: 93-113

Tube ϕ : 25 + 30x40 D Section
Pipe Centres / Face-Face Cons: 555
Elec. element if specified: 600 W
Output @ 50° C Δ T Watts: 754 W
BTUs: 2573 W

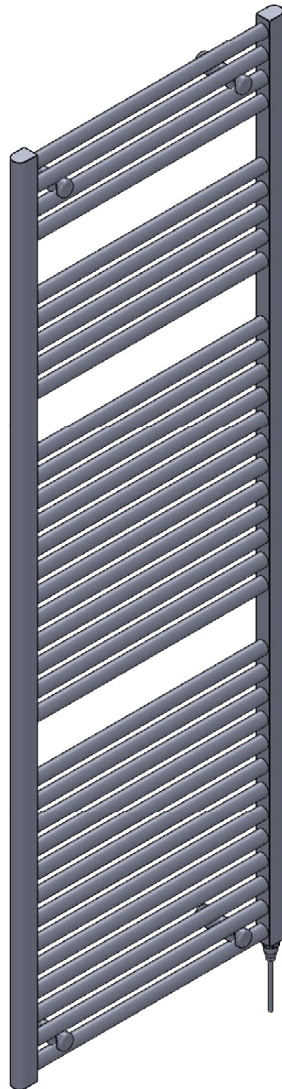

brackets extendable
by a further 20mm

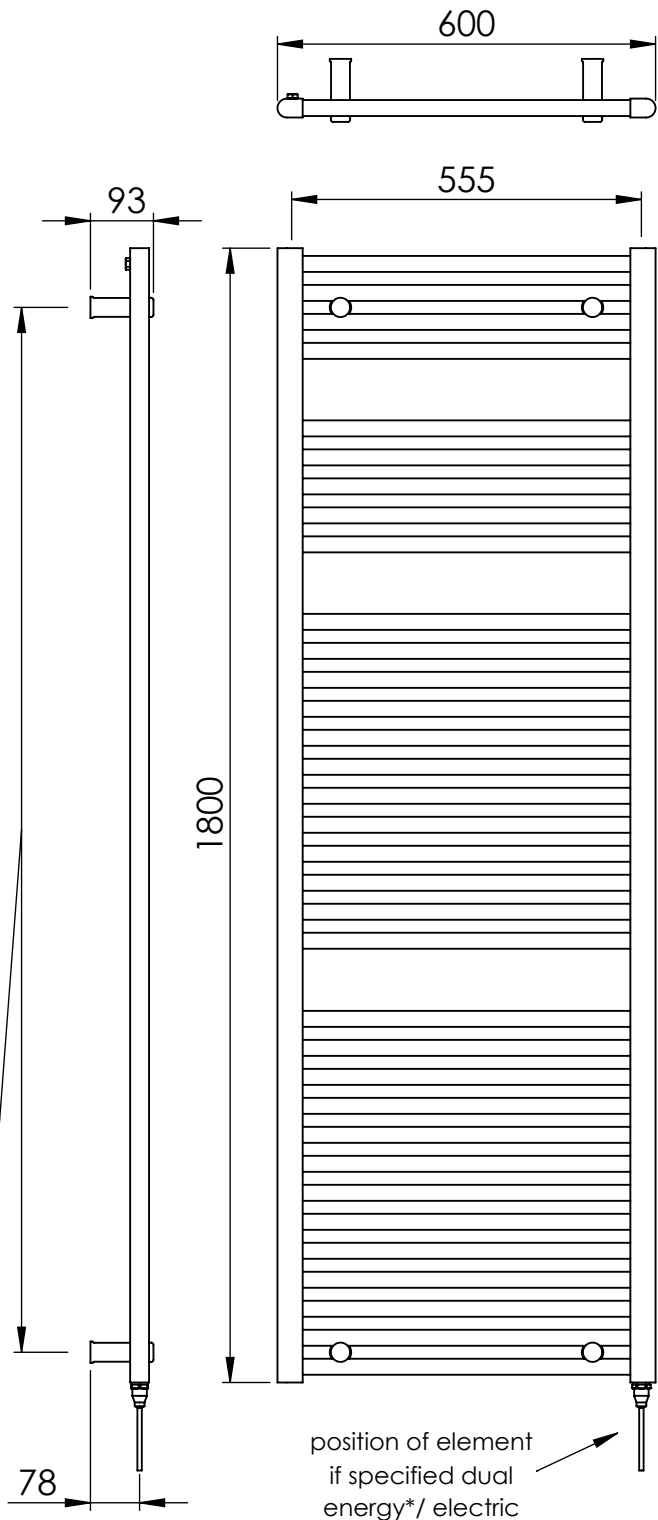

*Dual energy models require a conversion-tee, consult relevant drawing for details.

esteem
bathrooms

25mm Straight

All dimensions in millimetres


Manufactured from Mild Steel

SCALE 1:12




E70051

Height: 800
Width: 300
Depth: 93-113

Tube ϕ : 25 + 30x40 D Section
Pipe Centres / Face-Face Cons: 255
Elec. element if specified: 100 W
Output @ 50° C Δ T Watts: 271
BTUs: 925

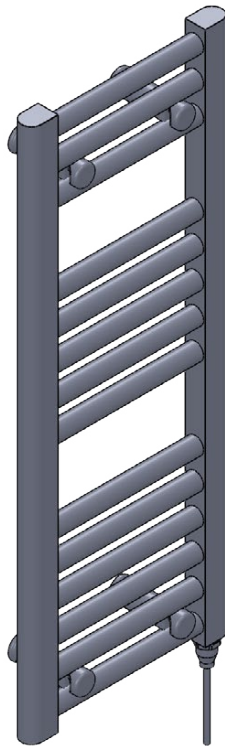

brackets extendable
by a further 20mm

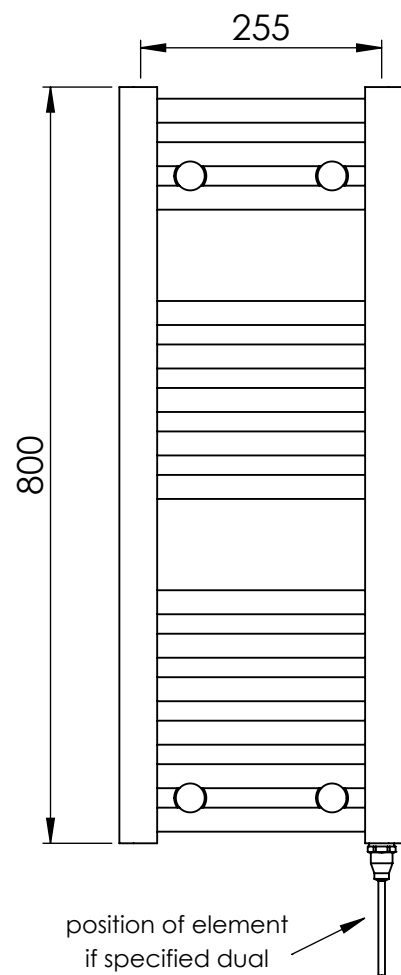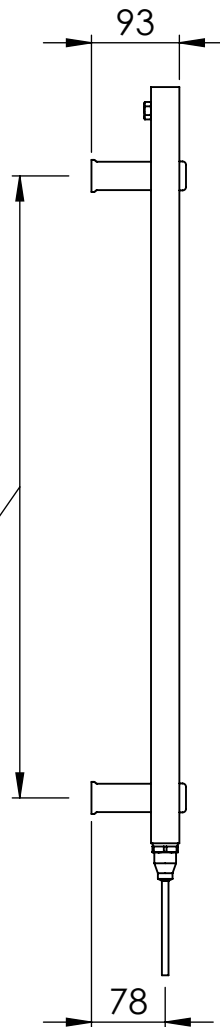

*Dual energy models require a conversion-fee, consult relevant drawing for details.

esteem
bathrooms

25mm Straight

All dimensions in millimetres


Manufactured from Mild Steel

SCALE 1:8




E70052

Height: 800
Width: 400
Depth: 93-113

Tube ϕ : 25 + 30x40 D Section
Pipe Centres / Face-Face Cons: 355
Elec. element if specified: 125 W
Output @ 50° C Δ T Watts: 346
BTUs: 1181

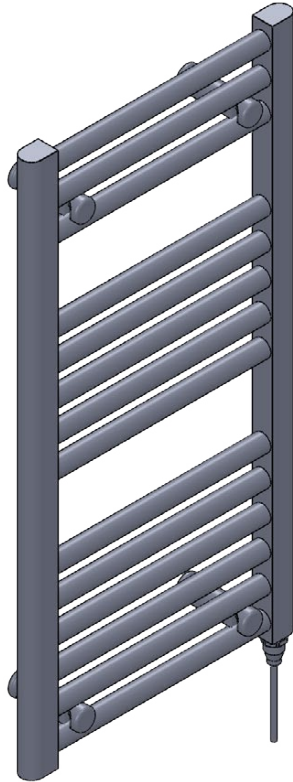

brackets extendable
by a further 20mm

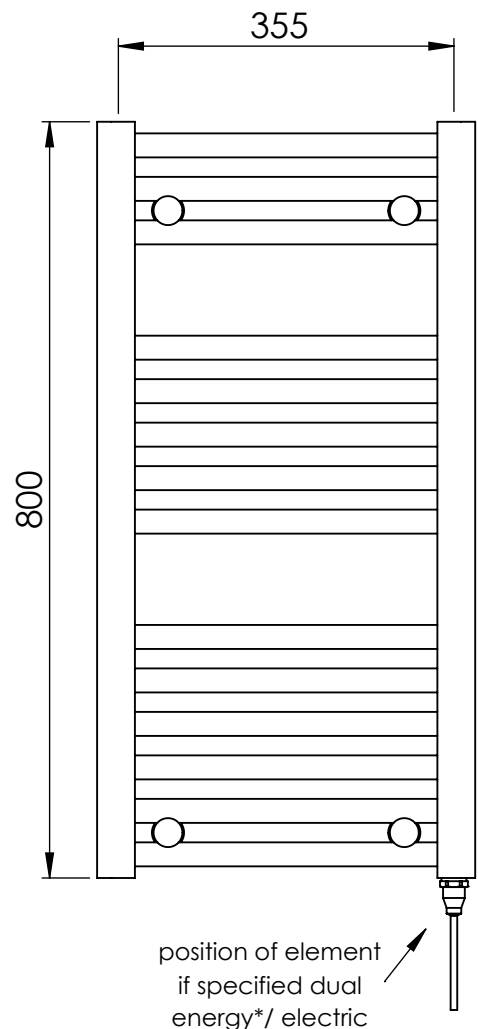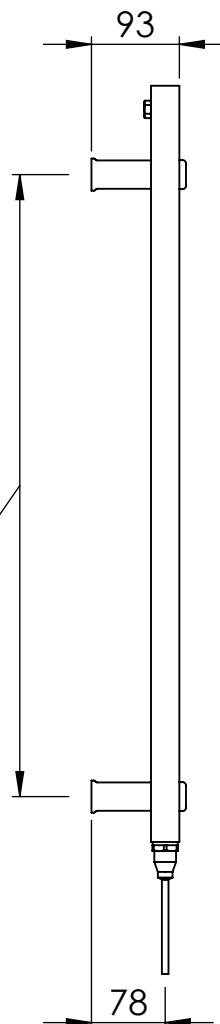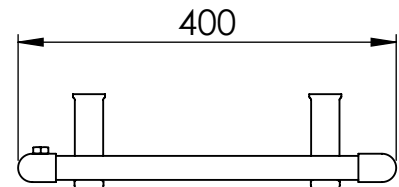

*Dual energy models require a conversion-tee, consult relevant drawing for details.

esteem
bathrooms

25mm Straight

All dimensions in millimetres


Manufactured from Mild Steel

SCALE 1:8


E70053

Height: 800
Width: 500
Depth: 93-113

Tube ϕ : 25 + 30x40 D Section
Pipe Centres / Face-Face Cons: 455
Elec. element if specified: 150 W
Output @ 50° C Δ T Watts: 420
BTUs: 1433

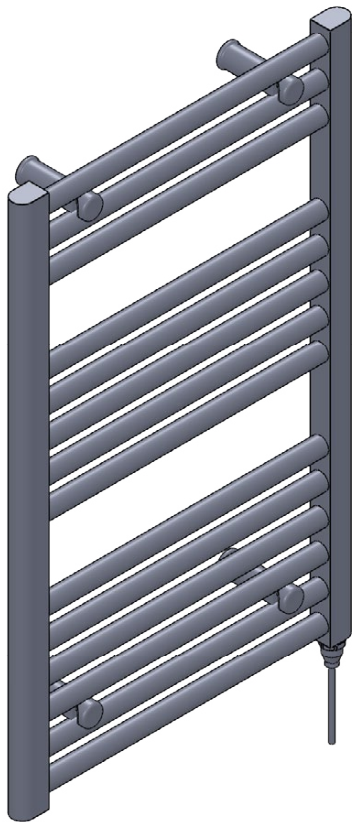

brackets extendable
by a further 20mm

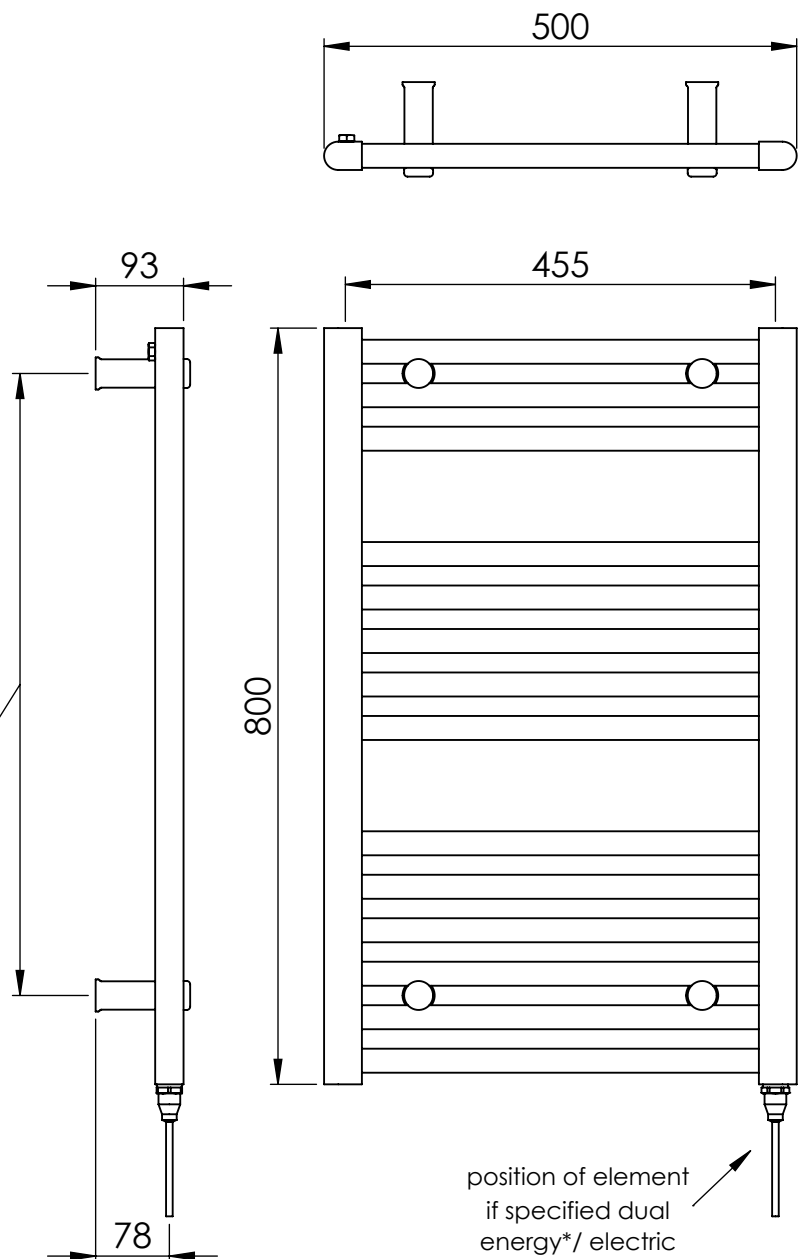

*Dual energy models require a conversion-tee, consult relevant drawing for details.

esteem
bathrooms

25mm Straight

All dimensions in millimetres


Manufactured from Mild Steel

SCALE 1:8


E70054

Height: 800
Width: 600
Depth: 93-113

Tube ϕ : 25 + 30x40 D Section
Pipe Centres / Face-Face Cons: 555
Elec. element if specified: 200 W
Output @ 50° C Δ T Watts: 495
BTUs: 1689

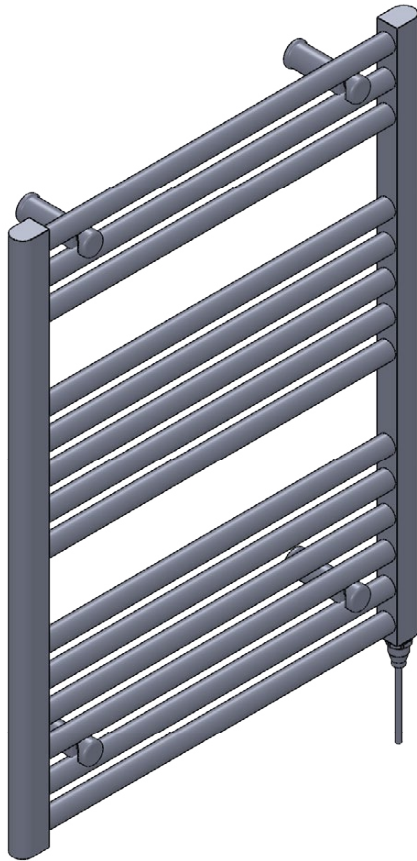

brackets extendable
by a further 20mm

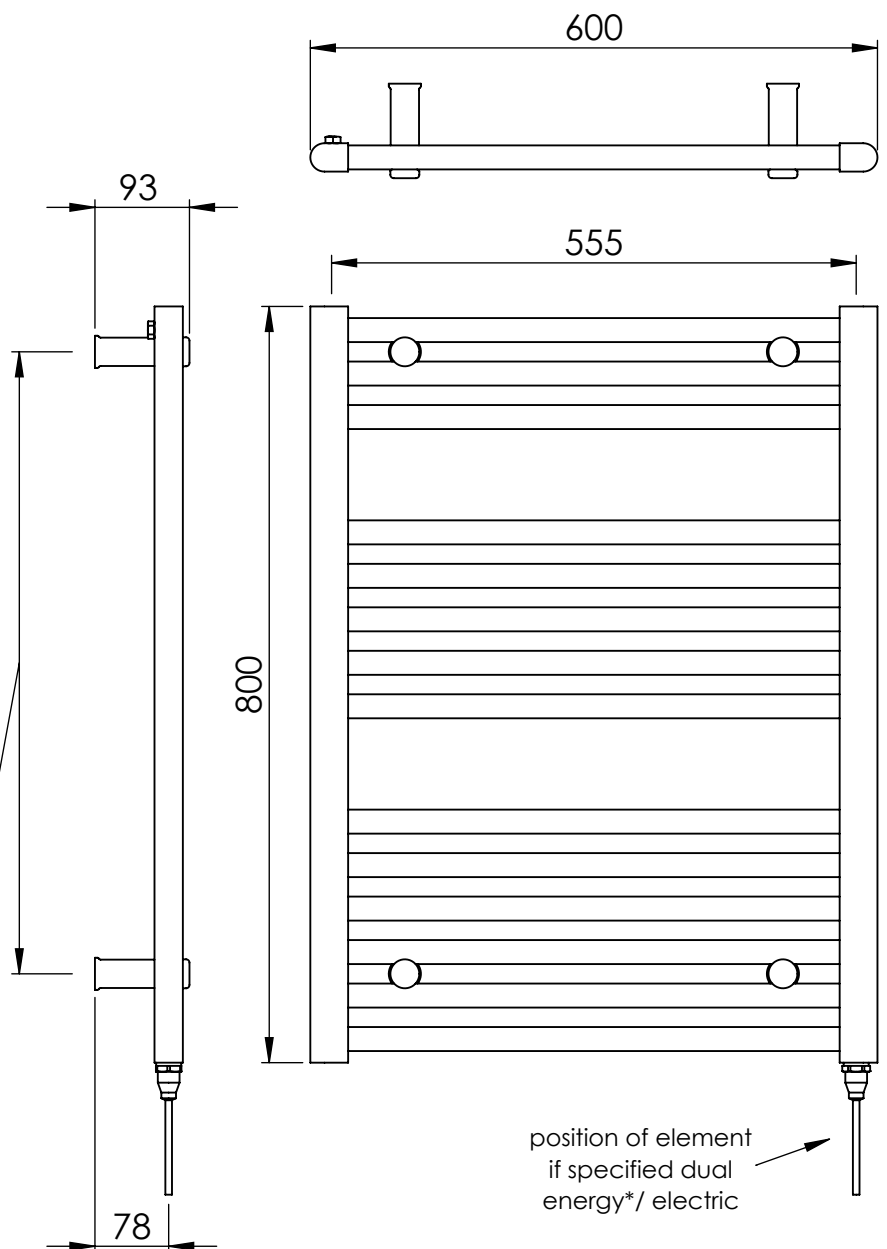

*Dual energy models require a conversion-fee, consult relevant drawing for details.

esteem[®]
bathrooms

25mm Straight

All dimensions in millimetres


Manufactured from Mild Steel

SCALE 1:8




E70055

Height: 1200
Width: 300
Depth: 93-113

Tube ϕ : 25 + 30x40 D Section
Pipe Centres / Face-Face Cons: 255
Elec. element if specified: 200 W
Output @ 50° C Δ T Watts: 424
BTUs: 1447

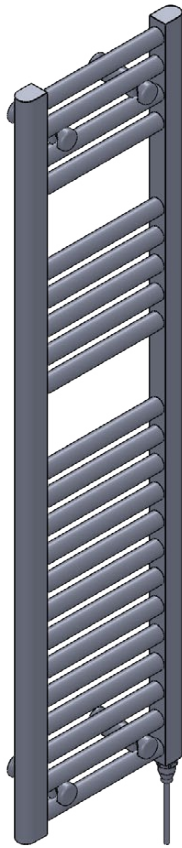

brackets extendable
by a further 20mm

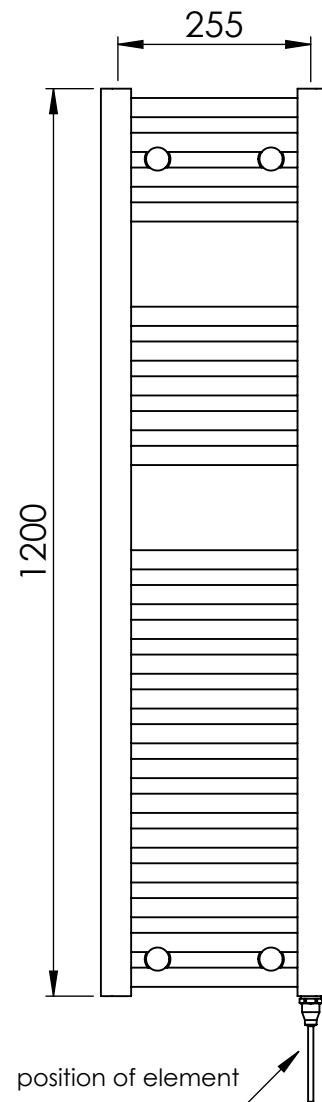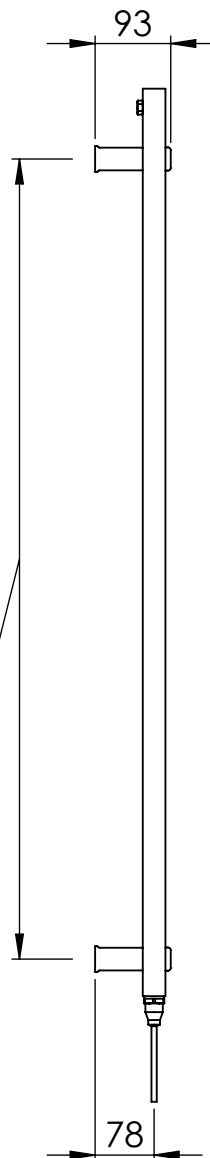

position of element
if specified dual
energy*/ electric

*Dual energy models require a conversion-tee, consult relevant drawing for details.

esteem
bathrooms

25mm Straight

All dimensions in millimetres


Manufactured from Mild Steel

SCALE 1:10




E70056

Height: 1200
Width: 400
Depth: 93-113

Tube ϕ : 25 + 30x40 D Section
Pipe Centres / Face-Face Cons: 355
Elec. element if specified: 200 W
Output @ 50° C Δ T Watts: 543
BTUs: 1853

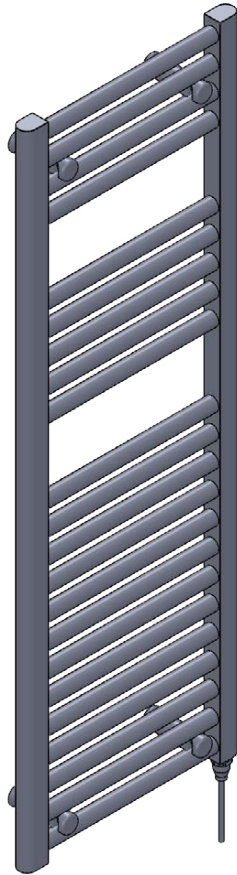

brackets extendable
by a further 20mm

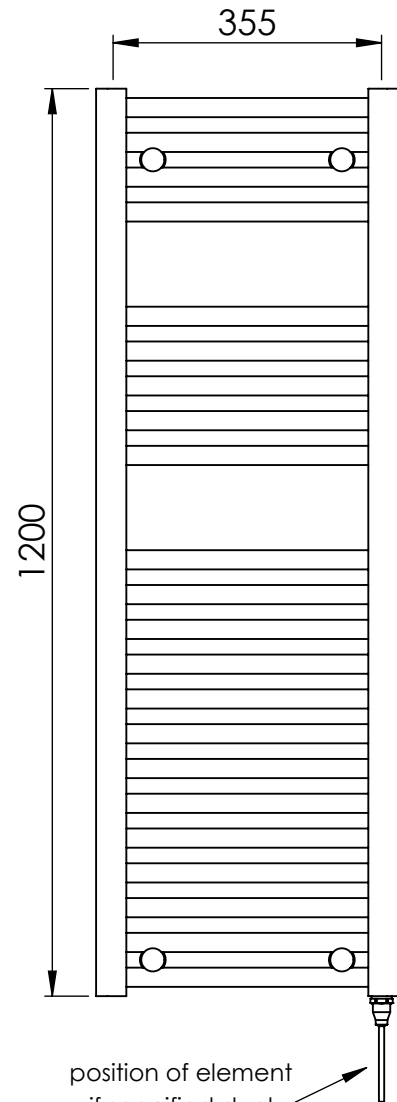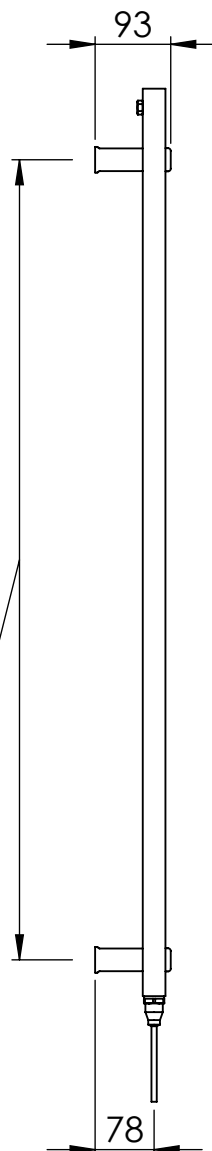

*Dual energy models require a conversion-tee, consult relevant drawing for details.

esteem
bathrooms

25mm Straight

All dimensions in millimetres


Manufactured from Mild Steel

SCALE 1:10



E70057

Height: 1200
Width: 500
Depth: 93-113

Tube ϕ : 25 + 30x40 D Section
Pipe Centres / Face-Face Cons: 455
Elec. element if specified: 300 W
Output @ 50° C Δ T Watts: 663
BTUs: 2262

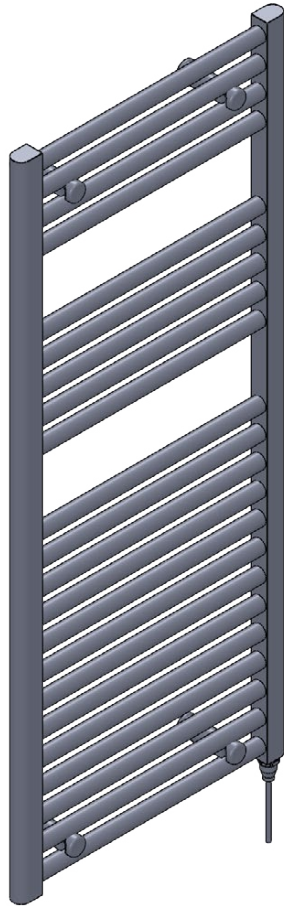

brackets extendable
by a further 20mm

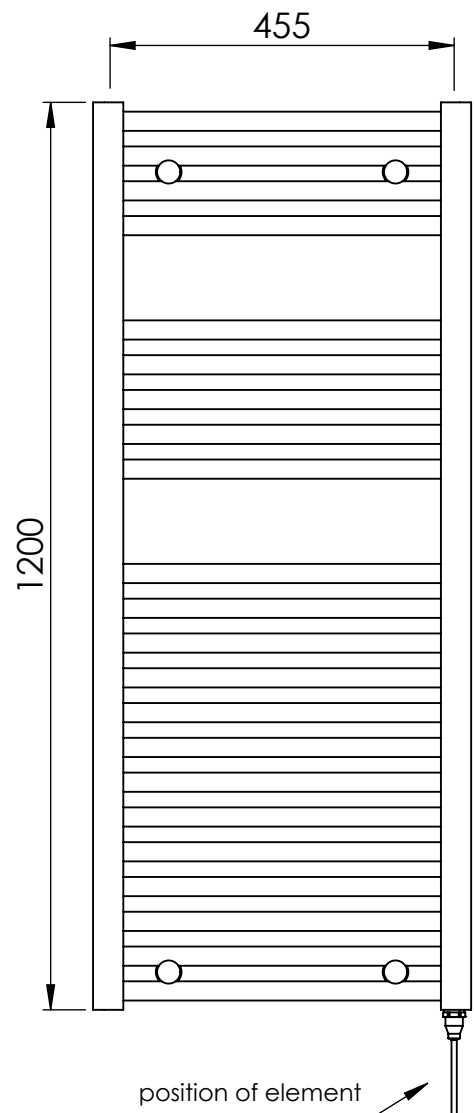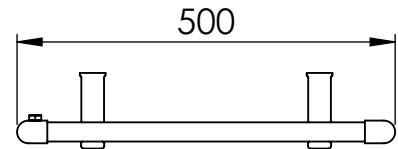

position of element
if specified dual
energy*/ electric

*Dual energy models require a conversion-tee, consult relevant drawing for details.

esteem
bathrooms

25mm Straight

All dimensions in millimetres


Manufactured from Mild Steel

SCALE 1:10


E70058

Height: 1200
Width: 600
Depth: 93-113

Tube ϕ : 25 + 30x40 D Section
Pipe Centres / Face-Face Cons: 555
Elec. element if specified: 400 W
Output @ 50° C Δ T Watts: 783
BTUs: 2672

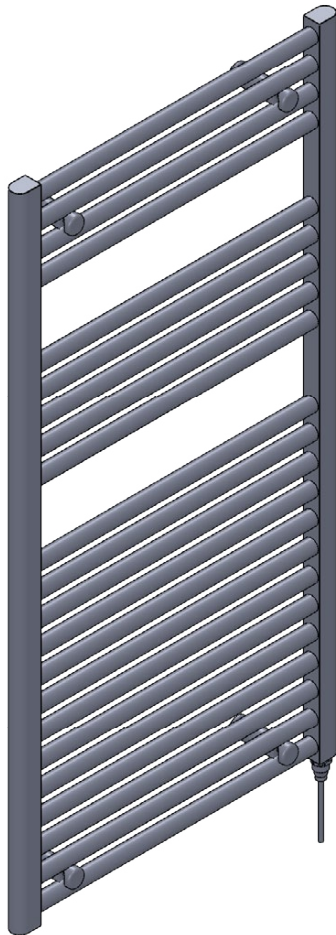

brackets extendable
by a further 20mm

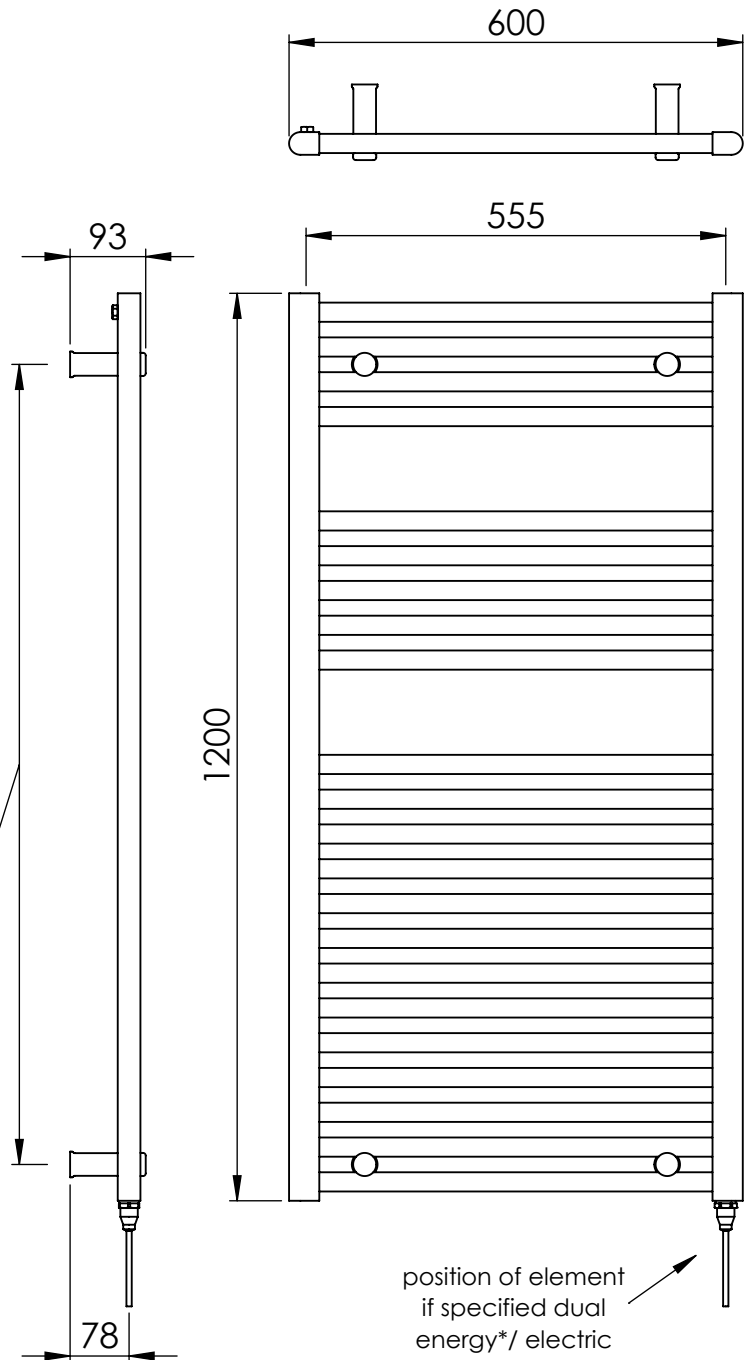

*Dual energy models require a conversion-tee, consult relevant drawing for details.

esteem
bathrooms

25mm Straight

All dimensions in millimetres


Manufactured from Mild Steel

SCALE 1:10




E70059

Height: 1500
Width: 500
Depth: 93-113

Tube ϕ : 25 + 30x40 D Section
Pipe Centres / Face-Face Cons: 455
Elec. element if specified: 300 W
Output @ 50° C Δ T Watts: 820
BTUs: 2798

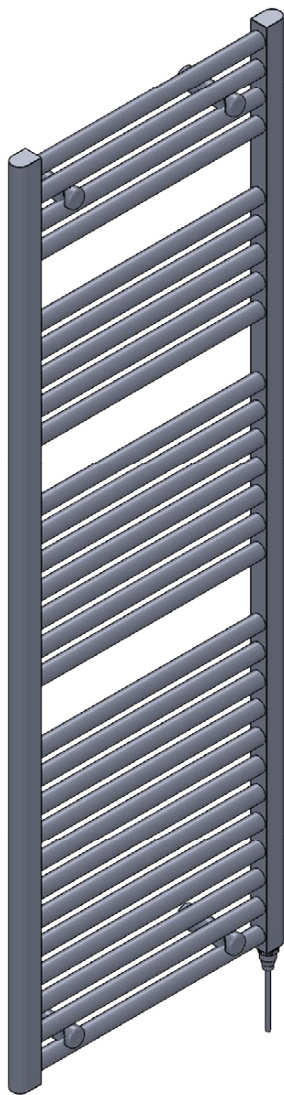

brackets extendable
by a further 20mm

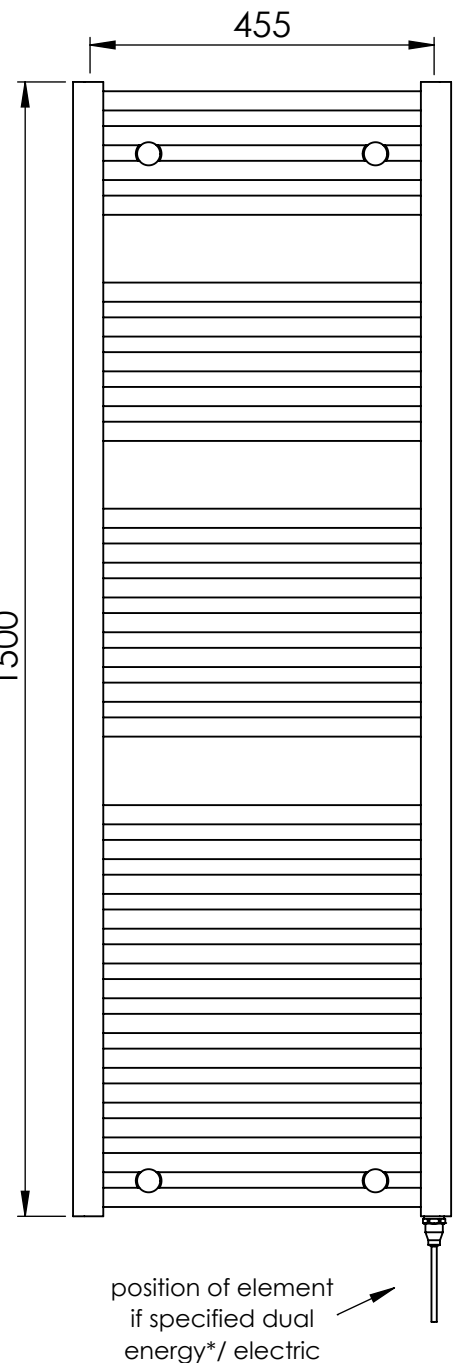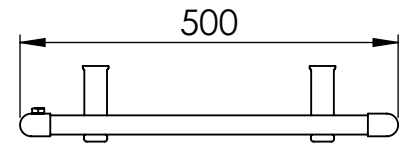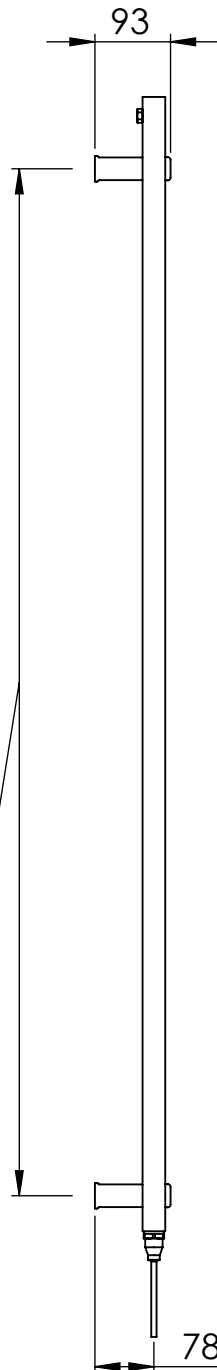

*Dual energy models require a conversion-tee, consult relevant drawing for details.

esteem
bathrooms

25mm Straight

All dimensions in millimetres


Manufactured from Mild Steel

SCALE 1:10


E70060

Height: 1500
Width: 600
Depth: 93-113

Tube ϕ : 1 + 1.2x1.6 D Section
Pipe Centres / Face-Face Cons: 555
Elec. element if specified: 400 W
Output @ 50° C Δ T Watts: 969
BTUs: 3306

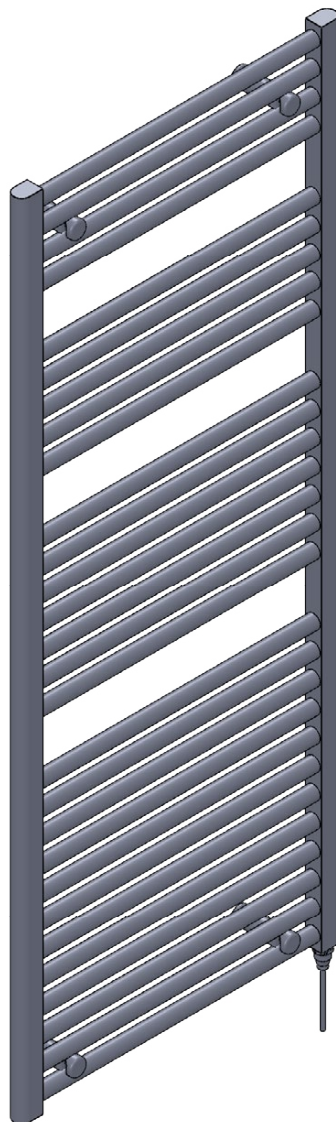

brackets extendable
by a further 20mm

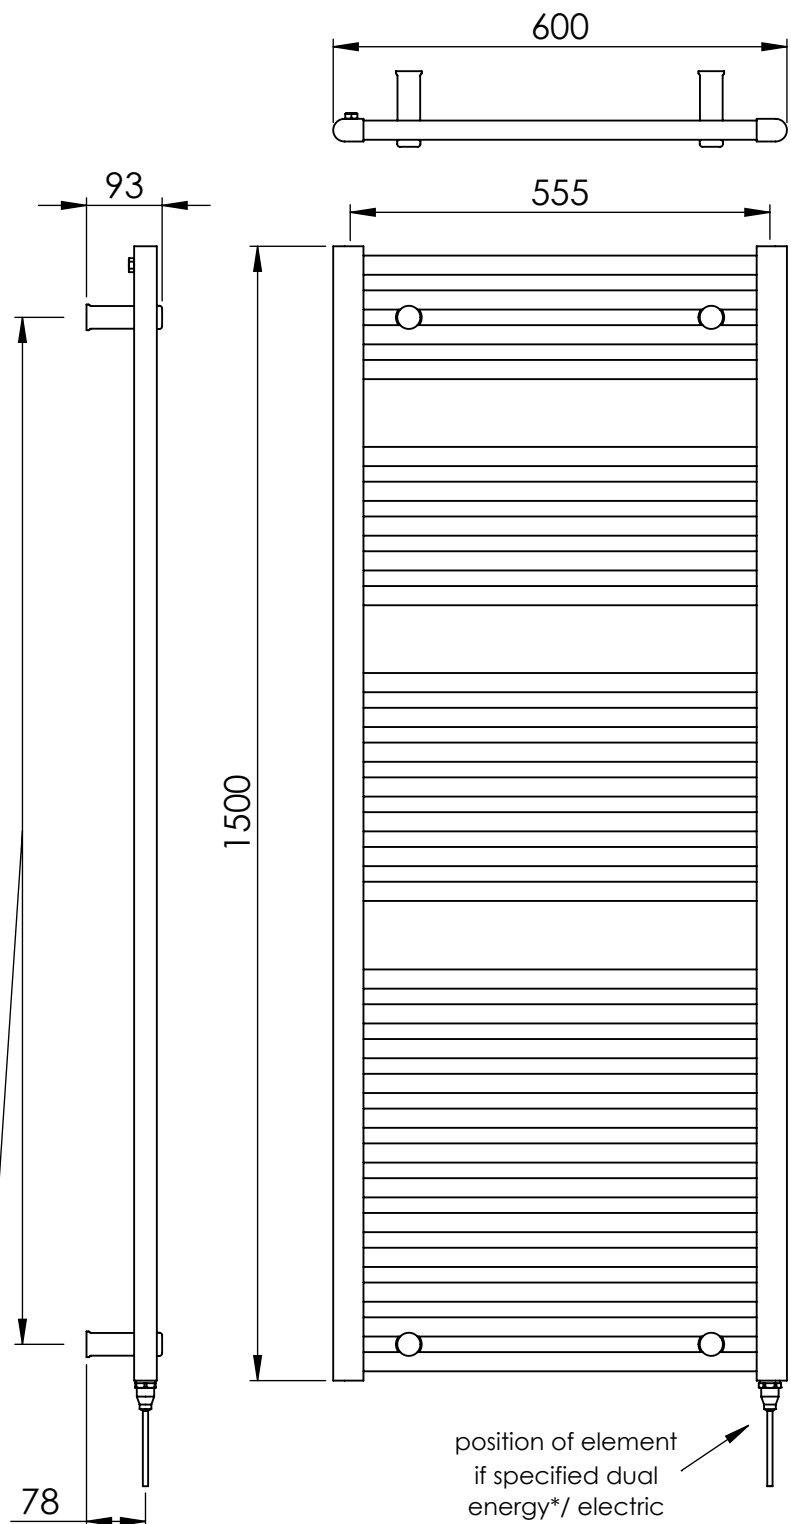

*Dual energy models require a conversion-tee, consult relevant drawing for details.

esteem
bathrooms

25mm Straight

All dimensions in millimetres


Manufactured from Mild Steel

SCALE 1:10


E70061

Height: 1800
Width: 400
Depth: 93-113

Tube ϕ : 25 + 30x40 D Section
Pipe Centres / Face-Face Cons: 355
Elec. element if specified: 400 W
Output @ 50° C Δ T Watts: 793
BTUs: 2706

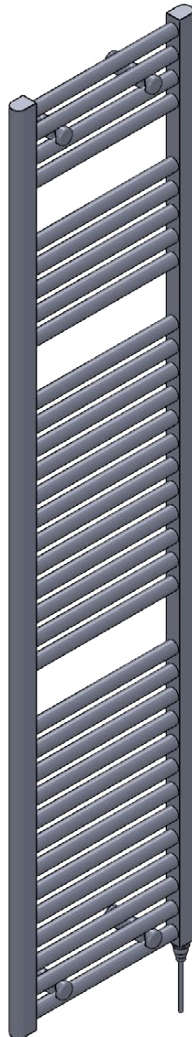

brackets extendable
by a further 20mm

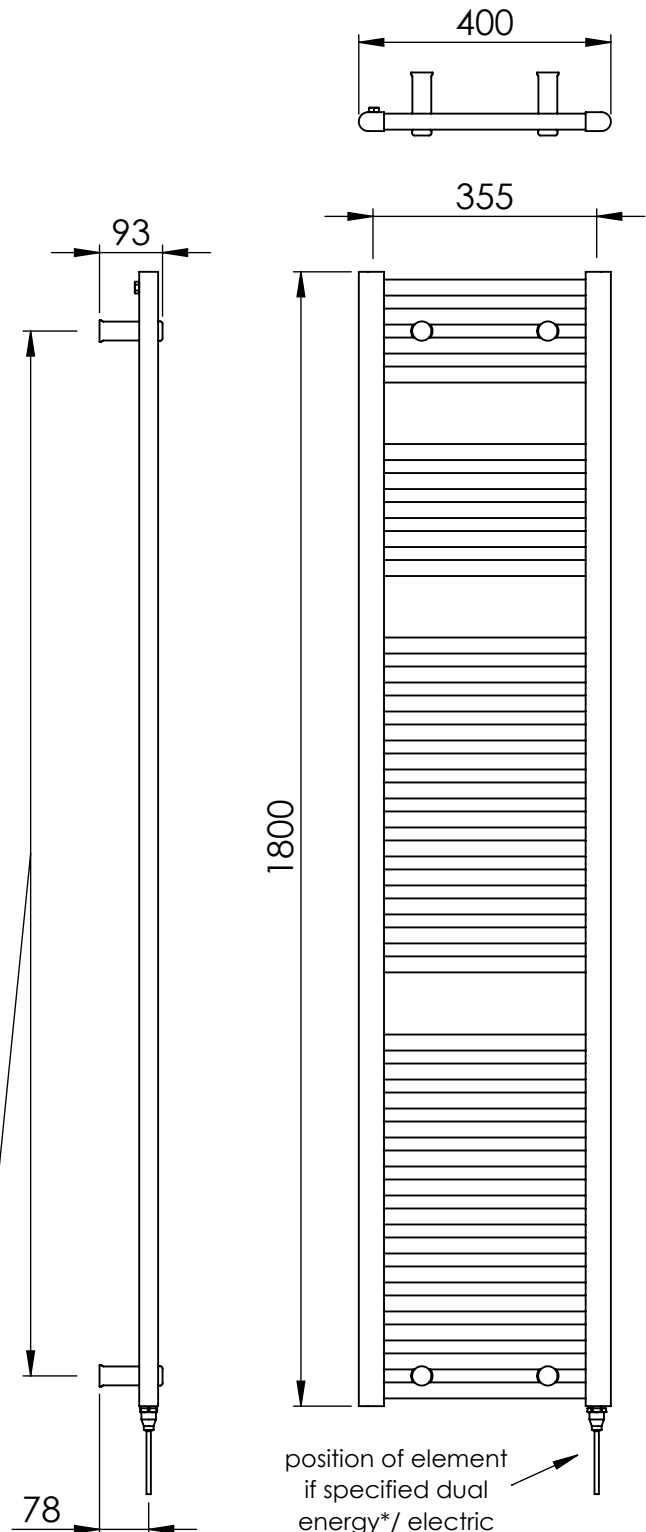

*Dual energy models require a conversion-tee, consult relevant drawing for details.

esteem
bathrooms

25mm Straight

All dimensions in millimetres


Manufactured from Mild Steel

SCALE 1:12


E70062

Height: 1800
Width: 500
Depth: 93-113

Tube ϕ : 25 + 30x40 D Section
Pipe Centres / Face-Face Cons: 555
Elec. element if specified: 600 W
Output @ 50° C Δ T Watts: 969
BTUs: 3306

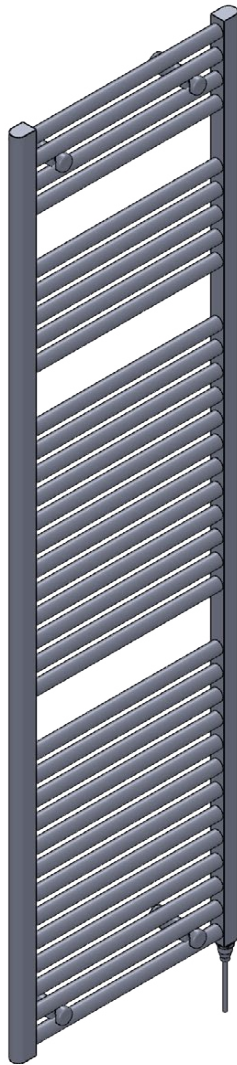

brackets extendable
by a further 20mm

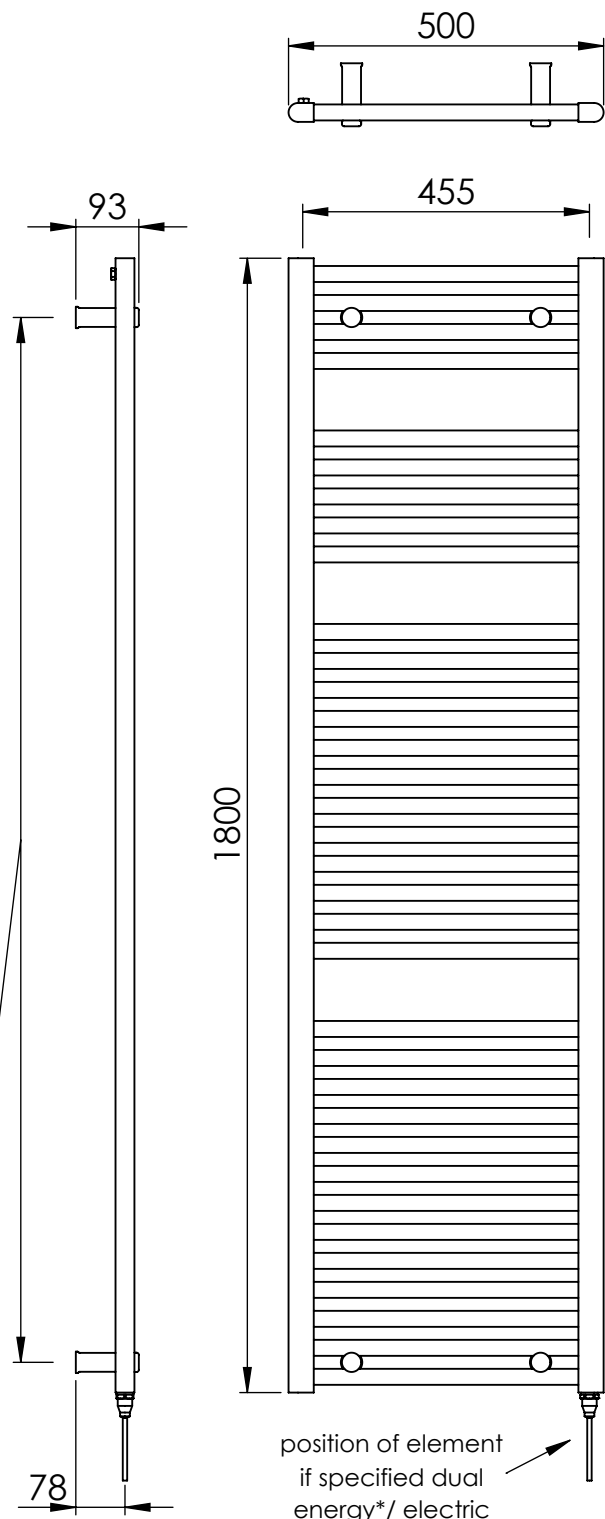

*Dual energy models require a conversion-tee, consult relevant drawing for details.

esteem
bathrooms

25mm Straight

All dimensions in millimetres


Manufactured from Mild Steel

SCALE 1:12


E70063

Height: 1800
Width: 600
Depth: 93-113

Tube ϕ : 25 + 30x40 D Section
Pipe Centres / Face-Face Cons: 555
Elec. element if specified: 600 W
Output @ 50° C Δ T Watts: 1146
BTUs: 3910

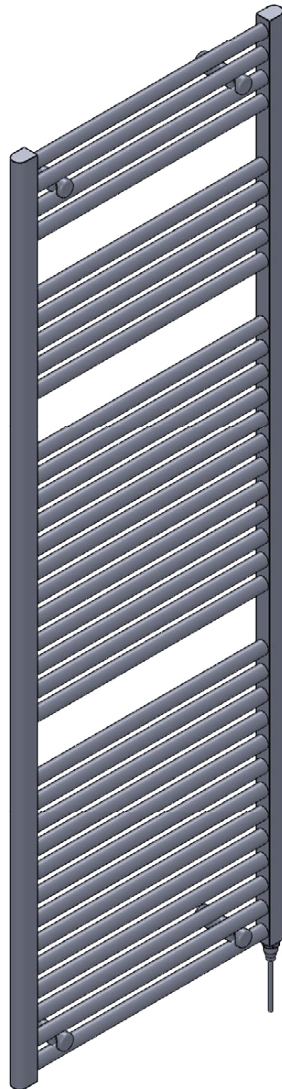

brackets extendable
by a further 20mm

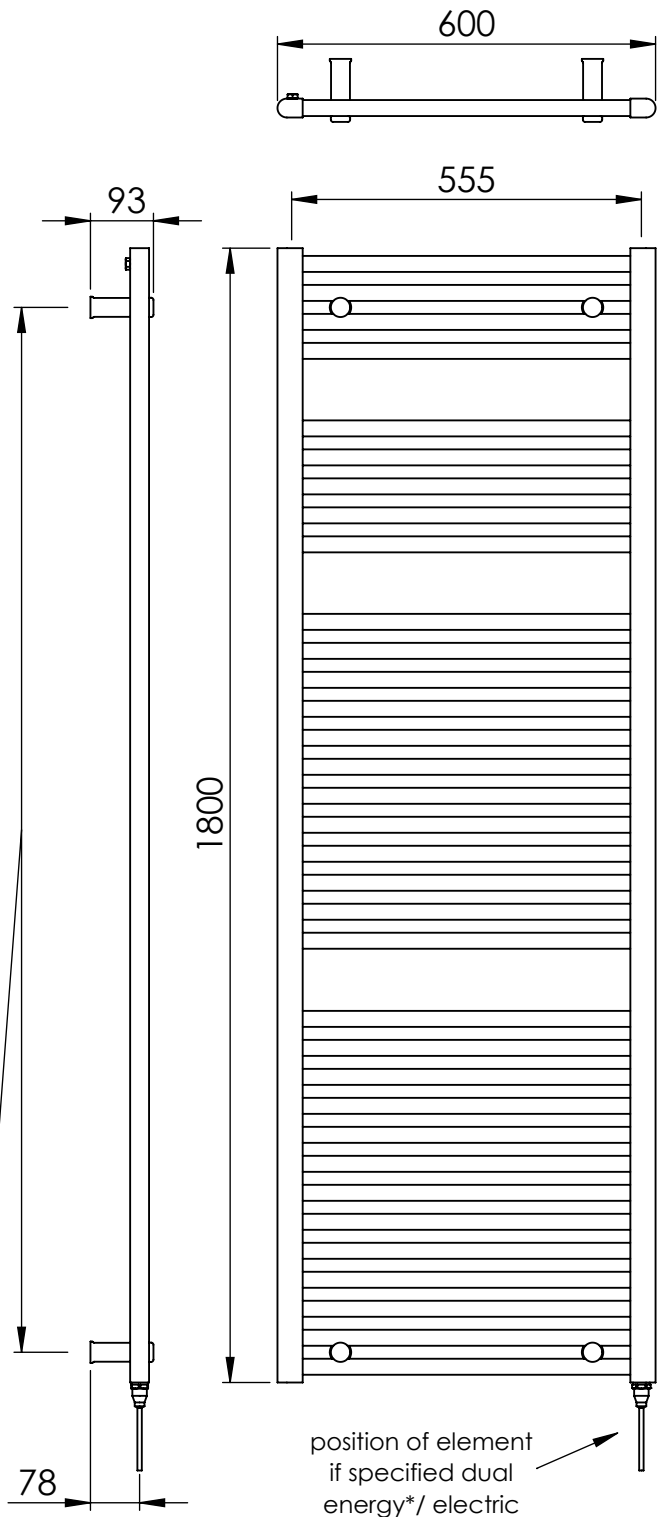

*Dual energy models require a conversion-tee, consult relevant drawing for details.

esteem
bathrooms

25mm Straight

All dimensions in millimetres

Manufactured from Mild Steel

SCALE 1:12