

Product Code: E61029

Product Description: DAYNIA-Pair basin taps (1/2")

Product Specification

Material:

Solid brass with a durable chrome finish

Fittings:

Metal Back nuts

Systems:

Suitable for high and low pressure systems

Suitable for Gravity fed systems

Suitable for Unvented systems

Suitable for Combi boilers

Additional Information


Always inspect before installation


Do not clean with abrasive cleaning products


WRAS approved



Pressure(bar)	Flow Rate(L/min)
0.3	8
0.5	10.2
1	14.5
2	20.6
3	25.3
4	29.3
5	32.7









Product Code: E61030

Product Description: DAYNIA-Pair bath taps (3/4")

Product Specification

Material:

Solid brass with a durable chrome finish

Fittings:

Metal Back nuts

Systems:

Suitable for high and low pressure systems

Suitable for Gravity fed systems

Suitable for Unvented systems

Suitable for Combi boilers

Additional Information


Always inspect before installation


Do not clean with abrasive cleaning products

WRAS approved



Pressure(bar)	Flow Rate(L/min)
0.3	8
0.5	10.2
1	14.5
2	20.6
3	25.3
4	29.3
5	32.7







Product Code: E61033

Product Description: DAYNIA-Mini Bloc Basin Mixer 30mm

Product Specification

Material:

Solid brass with a durable chrome finish

Fittings:

Single stud fixing kit

Systems:

Suitable for high and low pressure systems

Suitable for Gravity fed systems

Suitable for Unvented systems

Suitable for Combi boilers

Additional Information


Always inspect before installation


Do not clean with abrasive cleaning products

WRAS approved

Cold Start

Pressure(bar)	Flow Rate(L/min)
0.3	2.3
0.5	3.1
1	4.5
2	6.3
3	7.7
4	9
5	10



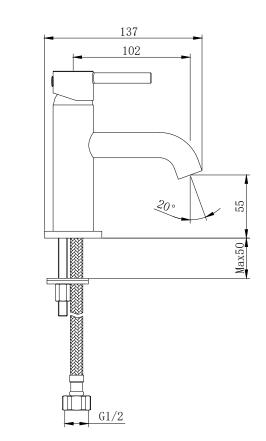





Product Code: E61098

Product Description: Esteem Daynia Mini Bloc Basin Mixer 30mm in black

Product Specification

Material:

Solid brass with a durable Matt Black finish

Fittings:

Single stud fixing kit

Systems:

Suitable for high and low pressure systems

Suitable for Gravity fed systems

Suitable for Unvented systems

Suitable for Combi boilers



Always inspect before installation

Do not clean with abrasive cleaning products

WRAS approved

Cold Start

Pressure(bar)	Flow Rate(L/min)
0.3	2.3
0.5	3.1
1	4.5
2	6.3
3	7.7
4	9
5	10

